


ITEM	DESCRIPTION	QTY	STORES ITEM NO	DRG NO	CEE-
1	CROSSHEAD	1		TNB-48	
2	ROPE	1		TNB-47	
3	ROPE THIMBLE	1		TNB-39	

AMENDMENTS	
NO	NAME DATE
1	JP du P 96-02-07

REVISED DRG NO WAS
CEP-1-98
DO REF: 198/003

STORES ITEM NO	54/2437
DIMENSIONS:	mm
SCALE:	1:2
A2	
DRAWING NO	CEE-
TNB-50	
SHEET	OF

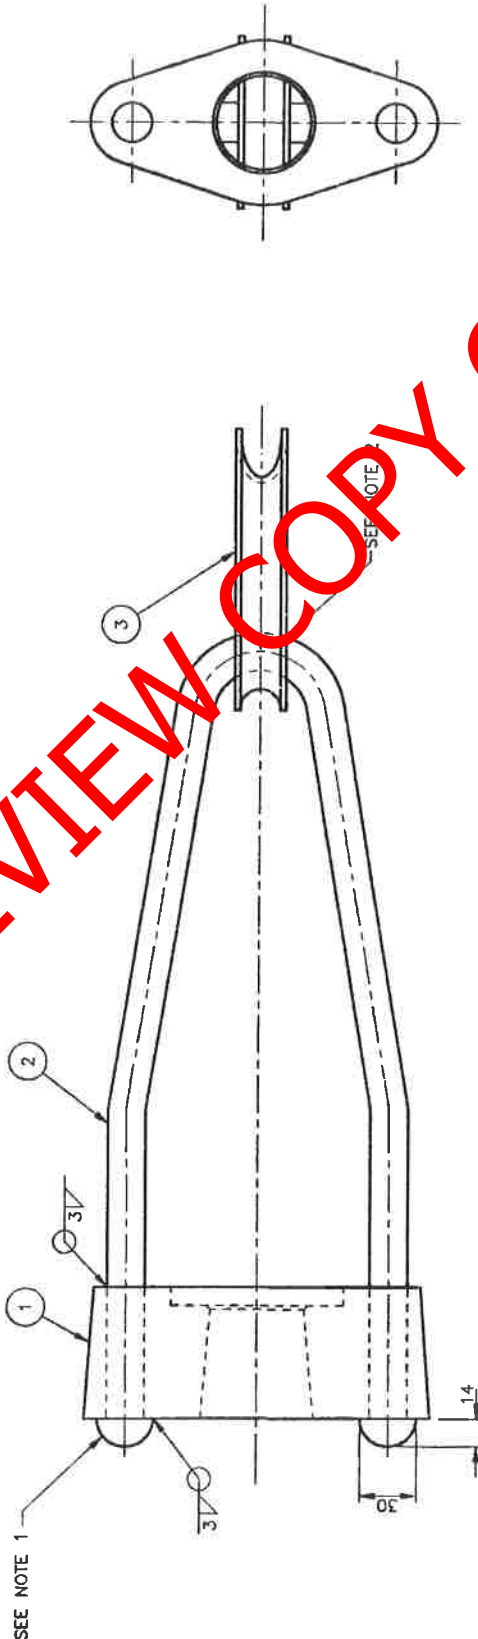

"PREVIEW COPY ONLY"

- NOTES
1. FORM RIVET HEADS "HOT".
 2. INSERT ITEM 2 THROUGH ITEM 3 BEFORE ASSEMBLY.
 3. STRENGTH: MINIMUM ULTIMATE TENSILE STRENGTH 222KN.
 4. ZINC COAT TO SABS 763 (TABLE 2) AFTER WELDING.

DO REF: C221/73	GEN TOL: LIN±	1	ANG±	-
DRN: E G LOUW	CHKD: J JACKSON	DATE: 74-02-06	for CHIEF ENG	
ENG:	F PIENAAR			
INFRASTRUCTURE (ELECTRICAL)		SPOORNET		

BOW AND CROSSHEAD ASSEMBLY
STAY WIRE ARRANGEMENT