

## REQUEST FOR QUOTATION ("RFQ")

#### **RFQ NUMBER CRAC-POE-8861**

### RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

ISSUE DATE : 16 JULY 2012

CLOSING DATE : 07 AUGUST 2012

OPTION DATE : 30 NOVEMBER 2012

CLOSING TIME : 10H00

BRIEFING DATE : 25 JULY 2012

BRIEFING TIME : 10H00

VENUE : POLOKWANE STATION

## FOR DIRECTION PLEASE CONTACT. Henry De Villiers (0833036245)

**TENDER BOX** 

ALLOCATED AT THE CHAIRPERSON TRANSNET FREIGHT RAIL ACQUISITION COUNCIL, GROUND FLOOR, INYANDA HOUSE 1, 21 WELLINGTON ROAD, PARKTOWN, JOHANNESBURG

TENDER ENVELOPE TO BE MARKED AS FOLLOWS:

RFQ NUMBER: CRAC-POE-8861

RENOVATE MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P Please note that late responses and those Delivered or posted to the wrong address will be disqualified



## **RFQ NUMBER CRAC-POE-8861**

### RENOVATE YARD MASTER'S AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

## **SCHEDULE OF DOCUMENTS**

- 1. Notice to Bidders
- 2. Requisition for quotation
- 3. Certificate of Attendance of RFQ Information meeting
- 4. Scope of Work and General specification
- 5. Safety: Act 85 of 1993 E4E
- 6. Returnable Schedules / Documents
- 7. Supplier Declaration Form
- 8. General Tender Conditions (CSS5 goods)
- 9. Standard Terms and Conditions of Contract (US7 Services)
- 10. Non-Disclosure Agreement



## **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

#### RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

## **NOTICE TO BIDDERS**

Quotations are requested from interested Respondents to supply the above-mentioned requirement to TRANSNET FREIGHT RAIL.

On or after **16 JULY 2012** the RFQ documents may be inspected at, and are obtainable from the office of TRANSNET Freight Rail, Tender Advice Centre, Ground Floor, Inyanda House 1, 21 Wellington Road, Parktown.

A non-refundable tender fee of R100.00 (inclusive of Vat) is applicable per tender (listed below). Payment is to be made to Transnet Freight Rail, Standard Bank Account number 203158598, Branch code 004805. The deposit slip must reflect the tender number and the Company Name. NOTE: This amount is not refundable.

Receipts to be presented prior to collection of the RFQ

A **COMPULSORY** information meeting will be held at the following venue:

VENUE : **POLOKWANE STATION** 

Time : 10h00

Date : 25 JULY 2012

The site meeting is compulsory and companies not attending <u>will be overlooked</u> during the tender awarding process. Respondents without a valid RFQ document in their possession will not be allowed to attend the compulsory clarification meeting. Make sure that you bring your safety shoes and reflective vest on site.

NAME : Esther Tyam/ Tel (011) 773 8557

Email : Esther.Tyam@transnet.net

Tenders in duplicate must reach the Secretary, TRANSNET Freight Rail Acquisition Council, before the closing hour on the date shown below, and must be enclosed in a sealed envelope which must have inscribed on the outside:

Tender No : CRAC-POE-8792

Description : RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE

02AM061P/02AM017P

Closing date and time: 07 AUGUST 2012 at 10h00

Closing address (refer options below)

#### **DELIVERY INSTRUCTIONS FOR THIS RFQ:**

- <u>If posted</u>, the envelope must be addressed to the Chairperson, TRANSNET Freight Rail Acquisition Council, P.O. Box 4244, Johannesburg 2000 and must be dispatched in time for sorting by the Post Office to reach the Chairperson before the closing time of the RFQ. In the event of the late receipt of a Proposal, the Respondent's franking machine impression will not be accepted as proof that the response was posted in time.
- **2** If delivered by hand, the envelope is to be deposited in the TRANSNET tender box which is located at the main entrance, Inyanda House,21 Wellington road, Park town, Johannesburg and should be addressed as follows:

THE CHAIRPERSON
TRANSNET FREIGHT RAIL ACQUISITION COUNCIL
INYANDA HOUSE
21 WELLINGTON ROAD
PARKTOWN
JOHANNESBURG
2001

The measurements of the "tender slot" are 500mm wide x 100mm high, and Respondents must please Ensure that response documents or files are not larger than the above dimensions. Responses which are Too bulky (i.e. more than 100mm thick) must be split into two or more files, and placed in separate Envelopes.

It should also be noted that the above tender box is located at the main entrance and is accessible to the public 24 hours per day, 7 days a week.

- <u>If dispatched by courier</u>, the envelope must be addressed as follows and delivered to the Office of The Chairperson, TRANSNET Freight Rail Acquisition Council and a signature obtained from that Office.
- 1. Please note that this RFQ closes punctually at 10:00 on Tuesday 07 AUGUST 2012
- 2. If responses are not posted or delivered as stipulated herein, such responses will not be considered and will be treated as "UNRESPONSIVE"
- 3. NO EMAIL OR FACSIMILE RESPONSES WILL BE CONSIDERED
- 4. The responses to this RFQ will be opened as soon as practicable after the expiry of the time advertised for receiving them.
- 5. TRANSNET shall not, at the opening of responses, disclose to any other company any confidential details pertaining to the Quotations received, i.e. pricing, delivery, etc. The names and location of the Respondents will, however, be divulged to other Respondents upon request.
- 6. Envelopes must not contain documents relating to any RFQ other than that shown on the envelope.
- 7. No slips are to be attached to the response documents. Any additional conditions must be embodied in an accompanying letter. Alterations, additions or deletions must not be made by the Respondent to the actual RFQ documents.

## 8. BROAD-BASED BLACK ECONOMIC EMPOWERMENT ("BBBEE")

TRANSNET fully endorses and supports the South African Government's Broad-Based Black Economic Empowerment Programme and it is strongly of the opinion that all business enterprises have an equal obligation to redress the imbalances of the past. TRANSNET would therefore prefer to do business with business enterprises who share these same values and who are prepared to contribute to meaningful BBBEE initiatives (including and not limited to enterprise development, subcontracting and Joint Ventures) as part of their tender response.

Transnet would accordingly allow a "preference" in accordance with the 10% preference system, as per the Preferential Procurement Policy Framework Act 5 of 2000 (as amended) to companies who provide a BBBEE accreditation Certificate. All procurement and disposal transactions in excess of R30000 will be evaluated accordingly. All transactions below R 30,000 will as far as possible be earmarked for EME's.

TRANSNET consequently urges Respondents (Large enterprises and QSE's – see below) to have themselves duly accredited by any one of the Accreditation Agencies **approved** by SANAS (South African National Accreditation System, under the auspices of the DTI).

In terms of Government Gazette No. 32467, Notice No. 810 dated 31 July 2009, as from 1 February 2010 only BBBEE certificates issued by Accredited Verification Agencies of Verification Agencies that are in possession of a valid pre-assessment letter from South African National Accreditation System will be valid.

However accreditation certificates issued by non-accredited verification agencies before 01 February 2010 and which are still within their one (1) year validity period will still be acceptable, until their expiry date provided that the accreditation was done in accordance with the latest codes (i.e. those promulgated on 9 February 2007).

BBBEE Accreditation Certificates issued after the published date i.e. 01 February 2010, by a Verification Agency not approved by SANAS, will NOT be acceptable as from 01 February 2010.

Enterprises will be rated by such Accreditation Agencies based on the following:

## (a) Large Enterprises (Le annual turnover >R35 million):

- > Rating level based on all 7 (seven) elements of the BBBEE scorecard
- Enterprises to provide BBBEE certificate and detailed scorecard (to be renewed annually

# (b) Qualifying Small Enterprises – QSE (i.e. annual turnover >R5 million but <R35 million):

- Rating based on any 4 (four) of the elements of the BBBEE scorecard
- Enterprises to provide BBBEE certificate and detailed scorecard (to be renewed annually)

# (c) <u>Exempted Micro Enterprises – EME (i.e. annual turnover <R5m are exempted from being rated or verified)</u>:

- ➤ Automatic BBBEE Level 4 rating, irrespective of race ownership, i.e. 100% BBBEE recognition
- ➤ Black ownership >50% or Black Women ownership >30% automatically qualify as Level 3 BBBEE rating, i.e. 110% BBBEE recognition

➤ EME's should provide documentary proof of annual turnover (i.e. audited financials) plus proof of Black ownership if Black ownership >50% or Black Women ownership >30% (to be renewed annually) from their Auditors / Accounting Officers

In addition to the above, Respondents who wish to enter into a Joint Venture (JV) or subcontract portions of the contract to BBBEE companies must state in their Tenders / Proposals the percentage of the total contract value which would be allocated to such BBBEE companies, should they be successful in being awarded any business. A rating certificate in respect of such BBBEE JV-partners and/or sub-contractors, as well as a breakdown of the distribution of the aforementioned percentage allocation must also be furnished with the tender response to enable Transnet to evaluate / adjudicate on all tenders received on a fair basis.

Each Respondent is required to furnish proof of its BBBEE status (Certificate and Detailed Scorecard) and ensure that the documentation is valid at the date of Tender Submission as stipulated above to TRANSNET.

Failure to submit your BBBEE Certificate and Detailed Scorecard will result in a score of zero being allocated for BBBEE evaluation.

Turnover: Indicate your company's most recent annual turnover:	
R	

- If annual turnover <R5m, please attach auditors / accounting officers letter confirming annual turnover and percentage black ownership as well as Black Women ownership
- If annual turnover >R5m please attach BBBEE certificate and detailed scorecard from an accredited rating agency.

The DTI has created an online B-BBEE Registry (http://www.dti.gov.za) in order to provide a central and standardized source of the B-BBEE status of all entities, and to facilitate the flow of this information amongst entities by providing a Unique Profile Number (UPN) per each listing. Existing and prospective suppliers are therefore urged to list their B-BBEE status on the DTI Registry. Hence, entities verified by DTI, will receive the following benefits:

- Their BBBEE status will be verified and confirmed by the DTI, before listing on the Registry
- Listing on the Registry will provide suppliers the option to market themselves on the DTI B-BBEE Opportunities Network. This is a search engine that is designed to help businesses find B-BBEE compliant entities who match specific requirements in terms of the nature of services/goods provided, region, B-BBEE status or other search criteria.

Transpet supports this DTI initiative and will use the DTI Registry to verify prospective and existing suppliers' BBBEE credentials.

Kindly provide Transnet with your DTI B-BBEE UNIQUE PROFILE NUMBER with all tender submissions.

DTI BBBEE UNIQUE PROFILE NUMBER:	

Failure to submit your BBBEE information in terms of the above-mentioned clauses will result in a score of zero being allocated for BBBEE evaluation.

### 9 COMMUNICATION

Respondents are warned that a response will be liable to disqualification should any attempt be made by a Respondent either directly or indirectly to canvass any officer(s) or employee of TRANSNET in respect of an RFQ between the closing date and the date of the award of the business.

A respondent may, however, BEFORE THE CLOSING DATE AND TIME, direct any enquiries relating to the RFQ to the TRANSNET employee as indicated in (2) above.

#### 10. RFQ SCHEDULE

Respondents will be contacted as soon as practicable with a status update. At this time short-listed Respondents may be asked to meet with TRANSNET representatives. Respondents are to provide a list of persons who are mandated to negotiate on behalf of their company, together with their contact details.

### 10.1 INSTRUCTIONS FOR COMPLETING THE RFQ

- (i) Sign one set of documents (sign and date the bottom of each page). This set will serve as the legal and binding copy. A duplicate set of documents is required. This second set can be a copy of the original signed Proposal.
- (ii) Both sets of documents to be submitted to the address specified above.
- (iii) The following returnable documents must accompany all Proposals:
  - The Respondent's latest audited financial statements;
  - The Respondent's valid Tax Clearance Certificate.
  - A CD copy where applicable

## 11. COMPLIANCE

The Respondent shall be in full and complete compliance with any and all applicable State and Local Laws and Regulations.

## 12. ADDITIONAL NOTES:

- All returnable documents as indicated in the Proposal Form (Section 3) must be returned with the response
- Changes by the Respondent to its submission will not be considered after the closing date
- The person or persons signing the Proposal must be legally authorized by the Respondent to do so (Refer Section 4). A list of those person(s) authorized to negotiate on your behalf must be submitted along with the Proposal
- All prices must be quoted in South African Rand
- TRANSNET reserves the right to undertake post-tender negotiations with the preferred Respondent or any number of short-listed Respondents

NB: Unless otherwise expressly stated, all Proposals furnished pursuant to this Request shall be deemed to be offers. Any exceptions to this statement must be clearly and specifically indicated. TRANSNET reserves the right to reject any or all offers.

FAILURE TO OBSERVE ANY OF THE ABOVE-MENTIONED REQUIREMENTS MAY RESULT IN THE PROPOSAL BEING REJECTED.

13. DISCLAIMERS

Respondents are hereby advised that TRANSNET is not committed to any course of action as a result of its issuance of this RFQ and/or its receipt of a Proposal in response to it. In particular, please note that TRANSNET reserves the right to:

- modify the RFQ's Goods or Services and request Respondents to re-bid on any changes
- reject any Proposal which does not conform to instructions and specifications which are detailed herein
- disqualify Proposals submitted after the stated submission deadline
- not necessarily accept the lowest priced Proposal
- reject all Proposals, if it so decides
- award a contract in connection with this Proposal at any time after the RFQ's closing date
- award only a portion of the proposed Goods or Services which are reflected in the scope of this RFQ
- split the award of the contract between more than one Supplier
- make no award of a contract

Kindly note that TRANSNET will not reimburse any Respondent for any preparation costs or other work

Performed in connection with the Proposal, whether or not the Respondent is awarded a contract.

14. Any PROPOSAL submitted by a Respondent is subject to negotiation and review of the

PHYSICALADDRESS:

Indent's contact person:

Designation:
Telephone:
Facsimile:
Email:

TRANSNET urges its clients and suppliers to report
Any fraud or corruption
On the part of Transnet' employees to

TIP-OFFS ANONYMOUS: 0800 003 056



## **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

## RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

REQUISITION	N FOR QUOTATION		
		SUPPLY CHAIN SERVICES	
COMPANY		001121011/41/021/1020	
		497	
NAME:			
		Contact: Esther Tyam	•
		Tel: 011 773 8557	
		Fax:011 773-2020	
Tel (011)			
Fax (011)			
1 ax (011)		•	
ISSUE DATE	16 -07- 2012		
1330L DATE	10 -07 - 2012		
01 001110			
CLOSING			
DATE	07-08- 2012 (10h00)		
Prices in Sou	ith African currency, including all costs.		
Direct to			
consignees			
ITEM NO:	DESCRIPTION		
	RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE		
1.	POLOKWANE 02AM061P/02AM017P		
1.	FOLORIVANE UZAIVIUU IF/UZAIVIU I/F		
Total price for	or the service		
2.Prices mus	st be V.A.T. exclusive		
3. Direct deliv	ered to: POLOKWANE STATION		
	Esther Tyam 011 773-8557/		
4.Contact pe			
	NOV DOCUMENTS	<u> </u>	

#### 5.COMPULSARY DOCUMENTS

## NOTE

:5.1.Return of tender documents

The tender documents must be submitted on the closing date in **duplicate** and failure To do so will automatically disqualify your offer.

5.2. The following documents are compulsory, and they must be attached to the tender document If it's a copy must be certified.

If **Not** your tender will not be considered.

- a) Tax Clearance Certificate
- b) Supplier Declaration Form
- c) Current Vat Registration No.
- d) BBBEE level certification and Score Card

#### 6. **FRAUD HOTLINE**

Transnet strives to be fair, equitable and just in all its dealings with tenderers. As such we encourage all tenderers to report any practice, activity or information that they are aware of or become aware of which may result in any perception of or actual fraud being committed against or in the name of Transnet. The hotline details are:-

Hotline telephone: 0800 003 056

transnet@tip-offs.com Email:

0800 007 788 Fax:

## 7. BUSINESS ADJUDICATION CRITERIA:

- 7.1."Order winning criteria"
- 7.1.1.Competitive pricing
- 7.1.2 Previous Experience
- 7.1.3 Availability
- 7.1.4. Letter of good standing
- 7.1.5. Capacity
- 7.5. Lead Time/ Delivery period
- 7.3."BBBEE"
- 7.3.1.Provide BBBEE level Certification

naii: <u>transnet@tip-offs.com</u>	47'
x: 0800 007 788	
All information received will be treat	ated with the utmost confidentiality
BUSINESS ADJUDICATION CRITERIA:	
1."Order winning criteria"	
1.1.Competitive pricing	
1.2 Previous Experience	
1.3 Availability	
1.4. Letter of good standing	
1.5.Capacity	
5. Lead Time/ Delivery period	
B."BBBEE"	
3.1.Provide BBBEE level Certification	
•	
SIGNATURE OF TENDERER:	Date:
CIGNATURE OF PERSONAL PROPERTY.	Date.



### **SECTION 3**

## **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

## RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

## **CERTIFICATE OF ATTENDANCE**

## 8. RFQ SITE MEETING:

A **COMP<u>ULSORY</u>** information meeting will be held at the following venue:

PPE SAFETY CL	OTHING I	MUST BE WORN ON SITE	
VENUE	:	POLOKWANE STATION	
Time	:	10H00	
Date	:	25 JULY 2012	

The site meeting is compulsory and companies not attending <u>will be overlooked</u> during the tender awarding process.

## **VERY IMPORTANT**

ANY TENDERER NOT ATTENDING THE INFORMATION MEETING <u>WILL</u> AUTOMATICALLY BE EXCLUDED FROM THE BUSINESS AWARDING PROCESS

SIGNATURE OF TENDERER:	Date:	


REFERENCES:			
COMPANY INFORMATION			
9. STATEMENT OF WORK	(S) SUCCESSFULLY CARRI	ED OUT BY TH	E TENDERER:
Tenderes are to advise which ot similar services.	her companies have they s	uccessfully pro	vided or are currently providing
Service Description	For whom done	Period	Contact person and Telephone or Cell number
			133
			N
			),
		A	
		·	
	10		
	•		
SIGNATURE OF TENDERER:		Date:	
▼			



## **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

## RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

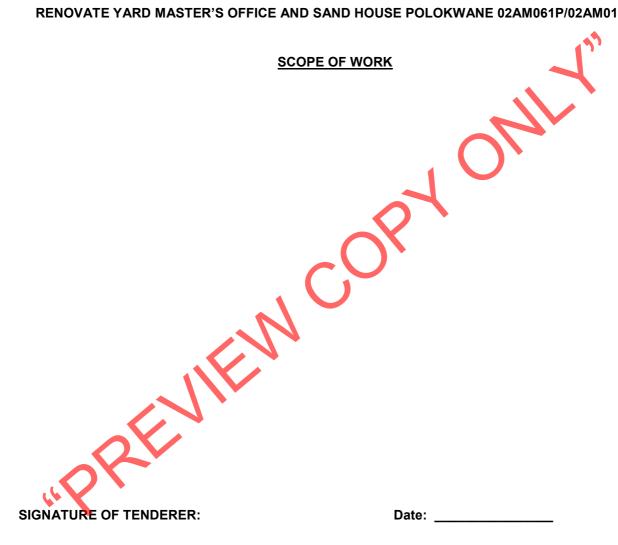

© This document as a whole is protected by copyright. The information herein is the sole property of Transnet Ltd. It may not be used, disclosed or reproduced in part or in whole in any manner whatsoever, except with the written permission of and in a manner permitted by the proprietors

# **BUILDINGS, BRIDGES & STRUCTURE**

POLOKWANE: OPERATIONS BUILDING ASSET NO. 02AM061P DEMOLISH WALLS AND MAKE LADIES KITCHEN BIGGER, RENOVATE BUILDING FOR 58 MEN AS PER GENERAL AND TECHNICAL SPECIFICATIONS.

# Schedule of work and prices

Item	Description	Quant	Unit	Price	Amount
	BRICKLAYER:				
1	LADIES KITCHEN. Break out existing steel door	1	JOB		
_	frame 114mm with wood door, and build opening	-	002	7	
	close with plaster both sides.				
2	LADIES KITCHEN. Break out 114mm brick wall and	9	M2		
	repair plaster at existing wall.				
3	LADIES KITCHEN. Break out 230mm brick wall and	10	M2		
	repair plaster at existing wall.		•		
4	LADIES KITCHEN, NEW LOCKER ROOM AND	35	<b>M2</b>		
	KITCHEN FOR MEN. Build 114mm brick wall with				
	comman bricks, and 75mm brick force every forth				
	row.(1/1,28x2,88m high)(1/1,29x2,88m high.)	•			
	(1/8,66X3,00M high)				
5	LADIES KITCHEN, NEW LOCKER ROOM AND	3	EA		
	KITCHEN FOR MEN. Build in 114mm steel door				
	frames without fanlight. (3 LH)		7.70		
6	LADIES KITCHEN. (Plaster walls both sides commen	23	<b>M2</b>		
	bricks. (2/1,28x2,88m high)(2/1,29 x 2,88m high.)				
	Door (2/0,86x2,07m) (Plaster face brick 1/1,60x1,94m high)				
7	LADIES KITCHEN. FLOOR TILES: Remove old floor	20	MO		
<b>'</b>	tiles. Chip floor, (chipping 50mm apart) Apply PRO-	20	<b>M2</b>		
	GRIP BASECOAT to floor. Supply and fix 3333N				
	TEC PIG GRANLFLOOR 1st GRADE				
	300X300mmx8.5mm FULL BODIED POCELAIN TILE				
	with 6mm spacing, 100mm tiled skirting (similar to				
	floor tiles) with the white plastic edge cover strip.				
	Fix with TAL GOLD STAR 6 HOUR ADHESIVE and				
· . <	flush pointed with <u>TAL ANTI BACTERIAL DOVE</u>				
(4)	GREY TINTED EPOXY GROUT must be used in				
	Ritchens, Toilets and Shower areas.( Available from				
	Tile Africa.)				
8	LADIES AND MEN KITCHEN. WALL TILES:	146	<b>M2</b>		
	(Chip wall above sink and wood cabinet.)(Chipping				
	25mm apart) Apply Pro-Grip Basecoat to walls.				
	Supplt and fix <u>Johnson's GWC-4 200X200mm Gloss</u> <u>White Wall Tiles</u> with 3mm spacing. Fixed <u>with TAL</u>				
	Gold Star 6 Hour Porcelain Adhesive and flush				
	pointed with TAL Super White Fine Grout. Finish of				
	with white plastic strips on outside corners.				
	(Available from Tile Africa.)				
9	NEW LOCKER ROOM AND KITCHEN FOR MEN.	97	M3		
	FLOOR TILES. Apply PRO-GRIP BASECOAT to	0.	1,10		
			l	I	<u>l</u>

					-
	floor. Supply and fix 3333N TEC PIG GRANI FLOOR				
	1 <sup>st</sup> GRADE 300X300mmx8.5mm FULL BODIED				
	POCELAIN TILE with 6mm spacing, 100mm tiled				
	skirting (similar to floor tiles) with the white plastic				
	edge cover strip. Fix with TAL GOLD STAR 6 HOUR				
	•				
	ADHESIVE and flush pointed with TAL ANTI				
	BACTERIAL DOVE GREY TINTED EPOXY GROUT				
	must be used in Kitchens, Toilets and Shower				
	areas. (Available from Tile Africa.)				
10	NEW LOCKER ROOM AND KITCHEN FOR MEN.	11	M3		
	Excavate in medium soft soil for foundations.	•••	1415		
	(2/11,90X0,60X0,50m)(1/8,66x0,60x0,50m)				
	(1/8,66x0,30x0,50)				
11	NEW LOCKER ROOM AND KITCHEN FOR MEN	8	M3		
	Cast concrete 20MPA in foundations.	0	IVIS		
	(2/11,90X0,60X0,30m)(1/8,66x0,60x0,30m)				
	(1/8,66x0,30x0,30)				
40			3.72	437	
12	NEW LOCKER ROOM AND KITCHEN FOR MEN	29	M3		
	Back fill on floor and compacted.				
	(1/8,66X5,00X0,29M)(1/8,66X6,00X0,29M)				
13	NEW LOCKER ROOM AND KITCHEN FOR MEN	96	M2		
	Supply and lay SABS 375U DPC on floor and bricks				
	before building and cast of concrete.				
14	NEW LOCKER ROOM AND KITCHEN FOR MEN	130	M2		
	Cast concrete floor 76mm thick. (25MPA.) (8 M3)		, ,		
	(1/8,66X5,00X76mm thick)(1/8,66X6,00X76mm thick)				
	(Wood float finishing.)				
	Cast concrete outside around new locker room and				
	kitchen in 3m blocks 76mm thick. (25MPA.)				
	1/33,00x1,00x76mm.(2,5 M3) (Wood float finishing.)				
	With nosing on edges, at joints and along brick-wall				
	(Nosing is (2/33,00m)(2/8/1,00m)= 82m long.				
15	NEW LOCKER ROOM AND KITCHEN FOR MEN.	96	M2		
.0	Supply 25mm topping on concrete floor, with wood float		1712		
	finishing. (25MPA) (2,50M3)				
16	NEW LOCKER ROOM AND KITCHEN FOR MEN	44	EA		
.0	Remove every 3 courses one brick on corners at existing	7-7	1371		
	wall 230mm to make a joint with new face-brick wall.				
17	NEW LOCKER ROOM AND KITCHEN FOR MEN	13	M2		
17	Build a 230mm foundation wall dark blue face brick	13	1712		
	outside and comman bricks in side, with 150mm				
	brick force every second row and the same colour				
	as the existing foundation.				
	(2/11,23x0,42m high)(1/8,66x0,42m high)				
18	NEW LOCKER ROOM AND KITCHEN FOR MEN.	97	<b>M2</b>		
	Build 230mm brick wall Yellow Brown face brick outside				
	and comman bricks in side, with 150mm brick force every				
(6)	forth row and the same colour as the existing building.				
•	Yellow Brown.) (2/11,23x2,90m high) (8,66x2,90m high)				
	(1/5,58 x 1,10m high.)				
19	NEW LOCKER ROOM AND KITCHEN FOR MEN.	26	EA		
	Build in wire roof anchors. (Wire NO.8)				
	, , , ,		TC A	+	
20	NEW LOCKER ROOM AND KITCHEN FOR MEN.	8	EA		
	Build in dagga (cement) air bricks inside and				
	outside of building.				
21	NEW LOCKER ROOM AND KITCHEN FOR MEN.	18	M		
	Supply yellow brown face brick and build brick on edge				
	window sill complete with DPC NSABS170U 150mm.				
22	NEW LOCKER ROOM AND KITCHEN FOR MEN.	23	M		
	Supply and fit 115mm Nutec window sill.(12/1,511M)				
	(2/1,02M)				
23	NEW LOCKER ROOM AND KITCHEN. FOR MEN.	1	EA		
		•	1111	1	

	T	Ī	T	•	1
	Brake through existing face brick-wall (230mm) and Build				
	114mm steel door frame in without fanlight. (RH)				
24	NEW LOCKER ROOM AND KITCHEN FOR MEN.	12	EA		
	Build E4H steel windows in with glass and putty.		L.		
25	NEW LOCKER ROOM AND KITCHEN FOR MEN.	54	M		
23	Do beam filling under roof and gable ends.	34	171		
	(2/18,33m)(3/5,50m)				
			IOD		
26	NEW KITCHEN FOR MEN. Cast concrete steps for	1	JOB		
	new steel door outside kitchen.				
27	EXISTING BUILDING: (East Side)	20	M2		
	Brake concrete out behind existing building, and				
	remove from site.				
	(1/11,50m longx1,74m widex76mm thick.) (1,52M3)				
28	NEW LOCKER ROOM AND KITCHEN FOR MEN.	166	<b>M2</b>		
	Plaster walls, in locker room steel troffel finishing,				
	and in kitchen wood float finishing.				
29	NEW LOCKER ROOM FOR MEN:	2	EA		
	Brake out old window sills it is face – bricks on	_	L.		
	edges. (2/1,02m) (2,04m)				
			1		
	CAPENTER:				
			10-		
30	EXISTING ROOF: Remove corrugated iron, wood	1	JOB		
	Purlins, Rafters, Hips, Valleys, Half Trusts, fascia				
	boards, Ceilings, 3/Extractor fans, Condiut pipes	4			
	and 8/Light fittings to make space for the new				
	trusts. The 8 Light fittings and 3/Extractor fans must				
	be install again.				
31	NEW ROOF: Supply erect and fix 18 new full Gang-	18	EA		
	Nail Trusts +- 8,88m wide and +- 1,52m high on wall				
	plate, fix it with wire roof anchors.				
32	EXISTING BUILDING, NEW LOCKER ROOM AND	40	M		
	KITCHEN FOR MEN.		1.2		
	Fix 114mmx38mm wood wall plate to walls.				
	(2/11,00m)(2/9,00m)				
33	EXISTING BUILDING, NEW LOCKER ROOM AND	220	M		
	KITCHEN FOR MEN. (2/5/22,00m)				
	Fix 50mmx76mm wood purlins to trusts, with sceenail				
	fixing, and 45 degrees mither joints. (Not But joints)				
2.4	EVICTING PULL DING NEW LOCKED BOOM AND	050	1.40		
34	EXISTING BUILDING, NEW LOCKER ROOM AND	250	<b>M2</b>		
, <	KITCHEN FOR MEN.  Fix Corrugated iron to wood purlins, with 65mm pozi-				
66	drive screws and 19mm Bonded washers.				
	Corrugated iron. (2/29/5,60m Long)				
35	EXISTING BUILDING, NEW LOCKER ROOM AND	24	M		<del> </del>
35	KITCHEN FOR MEN.	<b>4</b> 4	1 <b>VI</b>		
	Fix 1,8m nock redging to nock, bend redging plate				
	with ball head hammer, to block rain water.				
	•	4.4	1.7		
36	EXISTING BUILDING, NEW LOCKER ROOM AND	44	M		
	KITCHEN FOR MEN. Fix 230mmx12mm Newtec fascia boards to sprockets with				
	jointer plates and 40mm round head braas screws with				
	braas washers. (2/22,00m)				
27	EXISTING BUILDING NEW LOCKER ROOM AND	47	1/1		
37	KITCHEN FOR MEN.	17	M		
	Fix 230mmx12mm Newtec barch boards to gable				
1	FIX 230HHHX 12HHH NEWLEC DATCH DOARDS TO GADIE		Ì		

ends with jointer plates and 40mm round head braas screws and braas washers. (3/5,50m)  38 LADIES AND MEN KITCHEN, MEN TWO LOCKER ROOMS AND SHOWERS. Install NEWTEC Ceiling board, with Bishof Strips. Supply 800mmx800mm trap door in men shower	
38 LADIES AND MEN KITCHEN, MEN TWO LOCKER ROOMS AND SHOWERS. Install NEWTEC Ceiling board, with Bishof Strips.	
ROOMS AND SHOWERS. Install NEWTEC Ceiling board, with Bishof Strips.	
Install NEWTEC Ceiling board, with Bishof Strips.	
Supply 800mmx800mm tran door in men shower	
- apply assuming and again mondian and an	
room new locker room and ladies kitchen.(3T/doors)	
(1/3,30X2,90)(1/4,37X2,51)(1/8,66X5,00m)	
(1/8,66X6,00m)(1/4,05X6,88M)(4,37X4,25M)	
39 LADIES AND MEN KITCHEN, MEN TWO LOCKER 125 M	
ROOMS AND SHOWERS.	
Fix 76mm Rino Cornice to ceilings and walls.	
(1/3,30m)(2/5,41m)(1/4,37m)(1/1,07m)(2/2/8,66m)	
(2/6,00m)(2/5,00m)	
40 LADIES KITCHEN AND NEW LOCKER ROOM FOR 3 EA	
MEN.	
Fix hard board doors to steel door frames.	
41 NEW LOCKER ROOM FOR MEN. 1 EA	
Fix hard wood flash back meranti door to steel door	
frame.	
42 LADIES KITCHEN AND NEW LOCKER ROOM FOR MEN. Fit and install two lever union mortice locks.	
FOR MEN. Manufacture and install three steel	
security gates in three steel frames, and fix it to	
brick-walls with 65mm raulbolts.(Square tubing	
25x25x2mm) (Round bars 10mm)(Mini ultralock	
40mm) (65mm Butter-Fly Hinges <u>Heavy Duty</u> )	
PLUMBER:	
44 LADIES AND MEN KITCHEN: 1 JOB	
Chase and install 22mm copper water pipes with	
copper fittings cold and hot in walls, do the	
installation complete.	
45 LADIES AND MEN KITCHEN: 1 JOB	
Install two sink waists, two rubber p- traps, 50mm	
PVC waist pipes and two Cobra Star Type Taps with	
goose neck.	
46 LADIES AND MEN KITCHEN: 2 EA	
Supply and fit 1,80mx870mm high steel cabinet unit	
with hinged doors and <u>double</u> stainless steel sink.	
47 LADIES AND MEN KITCHEN: Supply and fit 2 EA	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE:  1 JOB	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve,	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof.	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete.	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.  49 LADIES AND MEN KITCHEN:  1 JOB	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.  49 LADIES AND MEN KITCHEN: (Transnet supply one 10 liter Hydro boil.) The	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.  49 LADIES AND MEN KITCHEN: (Transnet supply one 10 liter Hydro boil.) The Contractor supply another 10 liter and install two	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.  49 LADIES AND MEN KITCHEN: (Transnet supply one 10 liter Hydro boil.) The Contractor supply another 10 liter and install two Hydro boils completely with two stopcocks.	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.  49 LADIES AND MEN KITCHEN: (Transnet supply one 10 liter Hydro boil.) The Contractor supply another 10 liter and install two Hydro boils completely with two stopcocks.  50 MEN SHOWER ROOM AND LADIES KITCHEN:  1 JOB	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.  49 LADIES AND MEN KITCHEN: (Transnet supply one 10 liter Hydro boil.) The Contractor supply another 10 liter and install two Hydro boils completely with two stopcocks.  50 MEN SHOWER ROOM AND LADIES KITCHEN: Remove all water pipes in ceiling, before the	
47 LADIES AND MEN KITCHEN: Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of cabinet.  48 MEN SHOWER ROOM GEYSER OUT SIDE: Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.  49 LADIES AND MEN KITCHEN: (Transnet supply one 10 liter Hydro boil.) The Contractor supply another 10 liter and install two Hydro boils completely with two stopcocks.  50 MEN SHOWER ROOM AND LADIES KITCHEN:  1 JOB	

Remove wash hand baisin waist pipe 50mm PVC and put it in the new locker room floor. Do all the work completely.  52 SEWERAGE OF BUILDING OUT SIDE: Dig 30m long x 600mm wide x 800mm deep and open existing sewerage pipe, cut and extend pipe for 30m with new 110mm PVC. Do all the work completely.  53 SEWERAGE OF BUILDING OUT SIDE: Build a new manhole 230mm brick-wall with comman bricks. Plaster walls inside with steel troffel finishing and outside wood float finishing. Manhole frame and cover is 930mmx780mm. Cast concrete floor 75mm thick. Do 90° benching in manhole with steel troffel finishing. Do 45° benching outside around the cover and frame with wood float finishing.  54 SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN Install a new coment gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDIG: Remove on or tree 550mm diameter 3mh ligh. Remove on tree 550mm diameter 3mh ligh. Remove on the stop of the subject of the subj				ı		1
work completely.  52 SEWERAGE OF BUILDING OUT SIDE: Dig 30m long x 600mm wide x 800mm deep and open existing sewerage pipe, cut and extend pipe for 30m with new 110mm PVC. Do all the work completely.  53 SEWERAGE OF BUILDING OUT SIDE: Build a new manhole 230mm brick-wall with comman bricks. Plaster walls inside with steel troffol finishing and outside wood float finishing Manhole frame and cover is 330mmx/80mm. Cast concrete floor femm thick. Do 90' benching in manhole with steel troffel finishing. Do 45' benching outside around the cover and frame with wood float finishing. Do 45' benching outside around the cover and frame with wood float finishing. Do 45' benching outside around the cover and frame with wood float finishing. Do 45' benching outside around the cover and frame with wood float finishing.  54 SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN Install a new cement guily with grit and 3-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDING: Remove another tree 300mm diameter and 16m high Remove diameter and 16m high Remove diameter and 16m high Remove diameter and		Remove wash hand baisin waist pipe 50mm PVC				
SEWERAGE OF BUILDING OUT SIDE:						
Dig 30m long x 600mm wide x 800mm deep and open existing sewerage pipe, cut and extend pipe for 30m with new 110mm PVC. Do all the work completely.  53						
Dig 30m long x 600mm wide x 800mm deep and open existing sewerage pipe, cut and extend pipe for 30m with new 110mm PVC. Do all the work completely.  53	52	SEWERAGE OF BUILDING OUT SIDE:	30	M		
for 30m with new 110mm PVC. Do all the work completely.  53		Dig 30m long x 600mm wide x 800mm deep and		1.1		
for 30m with new 110mm PVC. Do all the work completely.  53		open existing sewerage pipe, cut and extend pipe				
completely.  53 SEWERAGE OF BUILDING OUT SIDE: Build a new manhole 230mm brick-wall with comman bricks. Plaster walls inside with steel troffel finishing and outside wood float finishing. Manhole frame and cover is 930mmx780mm. Cast concrete floor 76mm thick. Do 90° benching in manhole with steel troffel finishing. Do 45° benching outside around the cover and frame with wood float finishing.  54 SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN Install a new cement gully with grit and 8-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high Remove another tree 300mm diameter 9m high.  57 EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (#25mmx20mm) (2/22,00m) with 4 Stope Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck daym. hips.:100x75mm.  ELECTRICAL: AL ELECTRICAL WORK MUST BE DONE ACCRDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new 20mil the old 3 Extractor fans with switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install me old gift, 2m Flourescent light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install type, and must be Chased in walls. (Do it before wall titles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Mon kitchen install three						
SEWERAGE OF BUILDING OUT SIDE:   Build a new manhole 230mm brick-wall with comman bricks. Plaster walls inside with steel troffel finishing and outside wood float finishing. Manhole frame and cover is \$30mmx780mm. Cast concrete floor 76mm thick. Do 90' benching in manhole with steel troffel finishing. Do 45' benching outside around the cover and frame with wood float finishing. Do 45' benching outside around the cover and frame with wood float finishing.    SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN Install a new cement gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.    MATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.    MATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.    MATER PIPES OF BUILDING OUT SIDE MEN KITCHEN INSTANCE AND THE STATE OF THE BUILDING: Remove another tree 300mm diameter 9m high.    MATER PIPES OF THE BUILDING: Remove another tree 300mm diameter 9m high.						
Build a new manhole 230mm brick-wall with comman bricks. Plaster walls inside with steel troffel finishing and outside wood float finishing. Manhole frame and cover is 93mmm/780mm. Cast concrete floor 76mm thick. Do 90° benching in manhole with steel troffel finishing. Do 45° benching outside around the cover and frame with wood float finishing.  54 SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN Install a new cement gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDING. Remove existing stand pipe and tap to a new point.  57 TWO TREES EAST OF THE BUILDING. (GUTTERS) Install White Crome Adeck Gutters, (125mm 80mm) (222,00m) with 4 Stop Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters, (125mm 80mm) (222,00m) with 4 Stop Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes, 100x75mm. Finish of the Company of th	E2		4	IOD		
comman bricks. Plaster walls inside with steel troffel finishing and outside wood float finishing. Manhole frame and cover is 930mmx780mm. Cast concrete floor 76mm thick. Do 90' benching in manhole with steel troffel finishing. Do 45' benching outside around the cover and frame with wood float finishing.  54	၁၁		TI.	JOB		
troffel finishing and outside wood float finishing. Manhole frame and cover is 930mmx780mm. Cast concrete floor 76mm thick. Do 90° benching in manhole with steet troffel finishing. Do 45° benching outside around the cover and frame with wood float finishing.  54						
Manhole frame and cover is 930mmx780mm. Cast concrete floor 76mm thick. Do 90° benching in manhole with steel troffel finishing. Do 45° benching outside around the cover and frame with wood float finishing.  54						
concrete floor 76mm thick. Do 90° benching in manhole with steel troffel finishing. Do 45° benching outside around the cover and frame with wood float finishing.  54 SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN Install a new cement gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDIG: Remove on tree 650mm diameter and 16m high. Remove another tree 300mm diameter 9m high.  57 EXISTING AND NEW BUILDING; (GUTTERS) Install White Crome Adeck Gutters. (125mm/880mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING; (BUTTERS) Install White Crome Adeck down bipes. 100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply we kitchens two Locker Rooms and shower room with new Wireing and new Conditut in walls and inroof, install new eight 1,2m Flourescent light fittings Anti- Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Conditut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
manhole with steel troffel finishing. Do 45* benching outside around the cover and frame with wood float finishing.  54						
benching outside around the cover and frame with wood float finishing.  54						
SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN   Install a new cement gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.						
SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN Install a new cement gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.    SEWERAGE OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.    SEWERAGE OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.    SEWISTING AND NEW BUILDING: (GUTTERS)					4	
Install a new cement gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.  55  WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56  TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high Remove another tree 300mm diameter 9m high.  57  EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (125mm/x80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  58  EXISTING AND NEW BUILDING: DOWN PIPES) Install White Crome Adeck down bipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59  LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireling and new Condiut in walls and in roof. Install new eight 1, 2m Flourescent light fittings with Ces and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 3 flight fittings with Ces and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 3 flight fittings with G again with men with Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60  LADIES AND MEN KITCHEN: Install the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61  LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three					17'	
Make a connection on 110mm sewerage pipe. Do all the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high Remove one tree 650mm diameter and 16m high Remove another tree 300mm diameter 9m high.  57 EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (125mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: AL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two Kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti - Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three	54		1	EA		
the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high Remove one tree 650mm diameter 9m high.  57 EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (325mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and inroof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 3 Extractor fans with new light Switches. Install the old 3 Extractor fans with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
the work completely.  55 WATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56 TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high Remove one tree 650mm diameter 9m high.  57 EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (325mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and inroof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 3 Extractor fans with new light Switches. Install the old 3 Extractor fans with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three		Make a connection on 110mm sewerage pipe. Do all			•	
STATER PIPES OF BUILDING OUT SIDE GALVENICE Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.						
Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  56	55		1	JOB		
connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.  TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high.  Remove another tree 300mm diameter 9m high.  EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (125mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  SPECIFICATIONS.  LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light tittings Anti - Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  COUNTY OF THE BUILDING: 1 JOB TO THE BUILDING. SEA NO MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  EADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
Remove existing stand pipe and tap to a new point.  TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high Remove another tree 300mm diameter 9m high.  EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (125mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes. 100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light ittitings Anti - Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  EADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three		connect it again with a new 20mm stopcock.				
TWO TREES EAST OF THE BUILDIG: Remove one tree 650mm diameter and 16m high Remove another tree 300mm diameter 9m high						
Remove one tree 650mm diameter and 16m high Remove another tree 300mm diameter 9m high.  57	56		1	IOR		
Remove another tree 300mm diameter 9m high.	30		4	JOD		
57 EXISTING AND NEW BUILDING: (GUTTERS) Install White Crome Adeck Gutters. (125mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  58 EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti - Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
Install White Crome Adeck Gutters.(125mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti - Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three		Remove another tree openini diameter on high				
Install White Crome Adeck Gutters.(125mmx80mm) (2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti - Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three		EVICTING AND NEW PULL BING (CUTTED)				
(2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.  58	57	EXISTING AND NEW BUILDING: (GUTTERS)	44	M		
Stop ends.  EXISTING AND NEW BUILDING: (DOWN PIPES) Install White Crome Adeek down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
S8   EXISTING AND NEW BUILDING: (DOWN PIPES)   Install White Crome Adeck down bipes.100x75mm.						
Install White Crome Adeck down pipes.100x75mm.  ELECTRICAL: ALL ELECTRICAL WORK  MUST BE DONE ACCORDINGLEY TO  MUNICIPALITY RULE'S AND  SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER  ROOMS AND SHOWER ROOM:  Supply two kitchens two Locker Rooms and shower  room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light ittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
ELECTRICAL: ALL ELECTRICAL WORK  MUST BE DONE ACCORDINGLEY TO  MUNICIPALITY RULE'S AND  SPECIFICATIONS.  59  LADIES KITCHEN, MEN KITCHEN TWO LOCKER  ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60  LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61  LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three	58		6	EA		
MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three		ELECTRICAL: ALL ELECTRICAL WORK				
MUNICIPALITY RULE'S AND SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
SPECIFICATIONS.  59 LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two lsolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
Solution   State   S						
ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
ROOMS AND SHOWER ROOM: Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three	59			JOB		
Supply two kitchens two Locker Rooms and shower room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three		ROOMS AND SHOWER ROOM:				
room with new Wireing and new Condiut in walls and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
and in roof. Install new eight 1,2m Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three	<b>1</b>					
Electronic, light switches and Globes in new locker room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN:	(4,					
room and new kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN:						
locker and shower room install the old 8/light fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
fittings with G again with new light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN:						
the old 3 Extractor fans with Switches. Do the lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
lighting completely.  60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
60 LADIES AND MEN KITCHEN: Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
Install two Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three	60		2	E A		
Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three	טט		4	LA		
before wall tiles.) Do all the wireing complete.  61 LADIES AND MEN KITCHEN: Remove old wall plugs. Men kitchen install three						
61 <u>LADIES AND MEN KITCHEN:</u> Remove old wall plugs. Men kitchen install <u>three</u> 5 <u>EA</u>						
Remove old wall plugs. Men kitchen install three	~4		_	T 4		
	61		5	EA		
new wall plugs Craptree Flush/Surface mounted						
		new wall plugs Craptree Flush/Surface mounted				

16A three pin and three in ladies kitchen. All the Condiut pipes must be Chased in walls. Do all the wireing for the wall plugs complete.  62 MEN SHOWER ROOM: Remove Extractor fans and install it again with new wireing and switches.  63 EXISTING D. B. BOARD: Install new Lockable Surface Mounted DB. Disconnect all the wireing, and Connect it on the new DB Board again. (Install new Circuit Breakers on new DB Board.)  PAINTER:  64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(1/1,29 x 2,88mhigh) Disconnect all the wireing and Cornice 3 Coats Dulux Dura 65 White.  65 LADIES AND MEN KITCHEN. TWO LOCKER ROOMS. Paint old and new cellings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate 2 Coats Dulux Pearlglo Lockness Code-3(1-5).  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate 2 Coats Dulux Pearlglo Lockness Code-3(1-5).  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, AND TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3(1-5).  69 TWO KITCHENS, AND TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Veariglo Lockness Code-3(1-5).  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Pearlglo Lockness Code-3(1-5).	
wireing for the wall plugs complete.  62	
62 MEN SHOWER ROOM: Remove Extractor fans and install it again with new wireing and switches. 63 EXISTING D. B. BOARD: Install new Lockable Surface Mounted DB. Disconnect all the wireing, and Connect it on the new DB Board again. (Install new Circuit Breakers on new DB Board.)  PAINTER: 64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,500 x 2,88mhigh) (2/4,28 x 2,88mhigh)(2/4,25 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)  EADIES AND MEN KITCHEN, TWO LOCKER ROOMS Point old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  65 LADIES AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3 1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Duray Docker ROOMS. SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
Remove Extractor fans and install it again with new wireing and switches.  63 EXISTING D. B. BOARD: Install new Lockable Surface Mounted DB. Disconnect all the wireing, and Connect it on the new DB Board again. (Install new Circuit Breakers on new DB Board.)  PAINTER:  64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Slik, Barely Beige. (Code - 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,38mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,38mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,38mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/1,28 x 0,38mhigh)(1/1,29 x 2,88mhigh) (2/1,28 x 2,38mhigh)(1/1,29 x 2,38mhigh) (2/1,28 x 2,38mhigh)(1/1,29 x 2,38mhigh) (2/1,28 x 2,38mhigh)(1/1,29 x 2,38mhigh)	
wireing and switches.  63 EXISTING D. B. BOARD: Install new Lockable Surface Mounted DB. Disconnect all the wireing, and Connect it on the new DB Board again. (Install new Circuit Breakers on new DB Board.)  PAINTER:  64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(2/4,25 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2 65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate 2 Coats Dulux Pearlglo Lockness Code-31-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate 2 Coats Dulux Pearlglo Lockness Code-31-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Duriversal White Undercoate.	
Baseline   Sustaine	
Install new Lockable Surface Mounted DB. Disconnect all the wireing, and Connect it on the new DB Board again. (Install new Circuit Breakers on new DB Board.)  PAINTER:  64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 × 2,88mhigh)(2/5,00 × 2,88mhigh) (2/1,28 × 2,88mhigh)(2/4,25 × 2,88mhigh) (2/4,37 × 2,88mhigh)(2/4,25 × 2,88mhigh)minius 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate 2 Coats Dulux Pearlglo Lockness Code-3 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Diviersal White Undercoate.	
Disconnect all the wireing, and Connect it on the new DB Board again. (Install new Circuit Breakers on new DB Board.)  PAINTER:  64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOMS: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(2/1,29 x 2,88mhigh)) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Diversal White Undercoate.	
new DB Board again. (Install new Circuit Breakers on new DB Board.)  PAINTER:  TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
Breakers on new DB Board.)  PAINTER:  64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 × 2,88mhigh)(2/5,00 × 2,88mhigh) (2/1,28 × 2,88mhigh)(1/1,29 × 2,88mhigh) (2/4,37 × 2,88mhigh)(2/4,25 × 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31,1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31,1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
PAINTER:  64 TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOMS:   Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/1,28 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2	
TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOMS:   Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/1,28 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2	
ROOM: Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(2/4,25 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
Paint raw interior walls 3 Coats paint. 1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceillings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
1 Coat Dulux Dura 65 White. 2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
2 Coats Dulux Wash N Wear Silk, Barely Beige. (Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate 2 Coats Dulux Pearlglo Lockness Code-31 1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
(Code – 3H1-1.) (2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh) (2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31.1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-31.1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
(2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
(2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh) (2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2  65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
65 LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
FOR MEN, AND SHOWERS FOR MEN AND LADIES. Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.  66 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate, 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate, 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
Dulux Dura 65 White.  66	
TWO KITCHENS, AND TWO LOCKER ROOMS.   Paint steel door frames 3 Coats paint.   1 Coat Dulux Universal White Undercoate.   2 Coats Dulux Pearlglo Lockness Code-3L1-5.   EA	
Paint steel door frames 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
2 Coats Dulux Pearlglo Lockness Code-3L1-5.  67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
67 TWO KITCHENS, AND TWO LOCKER ROOMS. Paint wood doors 3 Coats paint. 1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5. 68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish. 69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
Paint wood doors 3 Coats paint.  1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
1 Coat Dulux Universal White Undercoate. 2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
2 Coats Dulux Pearlglo Lockness Code-3L1-5.  68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
68 TWO KITCHENS, AND TWO LOCKER ROOMS. Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
Sand Hard Wood doors and 2 Coats Clear Varnish.  69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
69 TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
SHOWERS. Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
Paint Steel Windows 3 Coats paint. 1 Coat Dulux Universal White Undercoate.	
1 Coat Dulux Universal White Undercoate.	
L COATS CHIMY PERIOD LOCKNESS CODE SLIDS	
(12/1,511widex0,654mhigh)(2/1,02xwidex1,42mhigh)	
(3/0,54 widex0,95m high)(1/1,03x1,24m high)	
(1/1,50 widex0,95m high)(1/0,53 widex0,60m high)	
(1/1,00 widex1,24m high)(3/0,54 widex0,95m high)	
(1/1,03 widex1,24m high) (8,63m2)	
70 EXTERIOR: 32 M2	
Paint exterior plaster walls 2 Coats Weatherguard,	
Barely Beige Code 3H1-1.	
(1/7,63X600mm)(1/1,72x600mm)(1/7,21x600mm)	
(1/9,23x600mm)(1/15,00x600mm)(6/2,55x240mm)	
(1/860mmx2,07m)(1/1,14x240mm)(1/1,40x240mm)	
71 <u>EXTERIOR:</u> 36 EA	
Paint new wood Sprockets 114mmx38mm 3 Coats	
paint. (18 sprockets x 2 sides)	
1 Coat Dulux Pink Wood Primer.	
1 Coat Dulux Universal White Undercoat.	
1 Coat Dulux White High Gloss.	
72 <u>EXTERIOR:</u> 50 M	

	Paint new wood Purlins 50mmx76mm 3 Coats paint.				
	(22mx 2 sides)(300mm x 6/3 sides)				
	1 Coat Dulux Pink Wood Primer.				
	1 Coat Dulux Universal White Undercoat.				
	1 Coat Dulux White High Gloss.				
73	EXTERIOR:	44	M		
	Paint new Fascia Boards 230mmx12mm 3 Coats				
	Dulux Dura 65 White. (2/22,00m)= 44,00m.				
74	EXTERIOR:	17	M		
	Paint new Barge Boards 230mmx12mm 3 Coats				
	Dulux Dura 65 White. (3/5,50m)=				
75	EXTERIOR:	1	JOB		
	Stencil Asset No 02AM061P in front of building on	-			
	brick-wall. (Size 50mm high)				
76	INTERIOR AND EXTERIOR:	1	JOB		
	Clean Building Inside and Out Site.	-	002		
77	Clean Site.	1	JOB	17.	
			TOTA	1	
			L		
			14%		
		GRAN	TOTA		
		D			

NAME OF THE COMPANY.....

## **SPECIFICATION**

<u>LADIES KITCHEN.</u> Break out existing steel door frame 114mm with wood door, and build opening close with plaster both sides.

LADIES KITCHEN. Break out 114mm brick wall and repair plaster at existing wall.

LADIES KITCHEN. Break out 230mm brick wall and repair plaster at existing wall.

<u>LADIES KITCHEN, NEW LOCKER ROOM AND KITCHEN FOR MEN.</u> Build 114mm brick wall with comman bricks, and 75mm brick force <u>every forth</u> row.(1/1,28x2,88m high)(1/1,29x2,88m high.) (1/8,66X3,00M high)

LADIES KITCHEN, NEW LOCKER ROOM AND KITCHEN FOR MEN. Build in 114mm steel door frames without fanlight. (3 LH)

LADIES KITCHEN. (Plaster walls both sides commen bricks. (2/1,28x2,88m high)(2/1,29 x 2,88m high.)
Door (2/0,86x2,07m)

(Plaster face brick 1/1,60x1,94m high)

LADIES KITCHEN. FLOOR TILES: Remove old floor tiles. Chip floor, (chipping 50mm apart) Apply PRO-GRIP BASECOAT to floor. Supply and fix 3333N TEC PIG GRANI FLOOR 1st GRADE 300X300mmx8.5mm FULL BODIED POCELAIN TILE with 6mm spacing, 100mm tiled skirting (similar to floor tiles) with the white plastic edge cover strip. Fix with TAL GOLD STAR 6 HOUR ADHESIVE and flush pointed with TAL ANTI BACTERIAL DOVE GREY TINTED EPOXY GROUT must be used in Kitchens, Toilets and Shower areas.( Available from Tile Africa.)

LADIES AND MEN KITCHEN. WALL TILES: (Chip wall above sink and wood cabinet.)(Chipping 25mm apart) Apply Pro-Grip Basecoat to walls. Supplt and fix Johnson's GWC-4 200X200mm Gloss White Wall Tiles with 3mm spacing. Fixed with TAL Gold Star 6 Hour Porcelain Adhesive and flush pointed with TAL Super White Fine Grout. Finish of with white plastic strips on outside corners. (Available from Tile Africa.) NEW LOCKER ROOM AND KITCHEN FOR MEN.

FLOOR TILES. Apply PRO-GRIP BASECOAT to floor. Supply and fix 3333N TEC PIG GRANI FLOOR 1<sup>st</sup> GRADE 300X300mmx8.5mm FULL BODIED POCELAIN TILE with 6mm spacing, 100mm tiled skirting (similar to floor tiles) with the white plastic edge cover strip. Fix with TAL GOLD STAR 6 HOUR ADHESIVE and flush pointed with TAL ANTI BACTERIAL DOVE GREY TINTED EPOXY GROUT must be used in Kitchens, Toilets and Shower areas. (Available from Tile Africa.)

NEW LOCKER ROOM AND KITCHEN FOR MEN.

Excavate in medium soft soil for foundations.

(2/11,90X0,60X0,50m)(1/8,66x0,60x0,50m)

(1/8,66x0,30x0,50)

NEW LOCKER ROOM AND KITCHEN FOR MEN.. Cast concrete 20MPA in foundations.

(2/11,90X0,60X0,30m)(1/8,66x0,60x0,30m)

 $(1/8,66\times0,30\times0,30)$ 

NEW LOCKER ROOM AND KITCHEN FOR MEN.. Back fill on floor and compacted.

(1/8,66X5,00X0,29M)(1/8,66X6,00X0,29M)

NEW LOCKER ROOM AND KITCHEN FOR MEN.. Supply and lay SABS 375U DPC on floor and bricks before building and cast of concrete.

NEW LOCKER ROOM AND KITCHEN FOR MEN.. Cast concrete floor 76mm thick. (25MPA.) (8 M3)

(1/8,66X5,00X76mm thick)(1/8,66X6,00X76mm thick)

(Wood float finishing.)

Cast concrete outside around new locker room and kitchen in 3m blocks 76mm thick. (25MPA.) 1/33,00x1,00x76mm.(2,5 M3) (Wood float finishing.)

With nosing on edges, at joints and along brick-wall.

(Nosing is (2/33,00m)(2/8/1,00m)= 82m long.

NEW LOCKER ROOM AND KITCHEN FOR MEN.. Supply 25mm topping on concrete floor, with wood float finishing. (25MPA) (2,50M3)

<u>NEW LOCKER ROOM AND KITCHEN FOR MEN..</u> Remove every 3 courses one brick on corners at existing wall 230mm to make a joint with new face-brick wall.

<u>NEW LOCKER ROOM AND KITCHEN FOR MEN...</u> Build a 230mm foundation wall dark blue face brick outside and comman bricks in side, with 150mm brick force every second row and the same colour as the existing foundation.

(2/11,23x0,42m high)(1/8,66x0,42m high)

NEW LOCKER ROOM AND KITCHEN FOR MEN. Build 230mm brick wall Yellow Brown face brick outside and comman bricks in side, with 150mm brick force every forth row and the same colour as the existing building. (Yellow Brown.) (2/11,23x2,90m high) (8,66x2,90m high) (1/5,58 x 1,10m high.)

NEW LOCKER ROOM AND KITCHEN FOR MEN. Build in wire roof anchors. (Wire NO.8)

### NEW LOCKER ROOM AND KITCHEN FOR MEN.

Build in dagga (cement) air bricks inside and outside of building.

NEW LOCKER ROOM AND KITCHEN FOR MEN. Supply yellow brown face brick and build brick on edge window sill complete with DPC NSABS170U 150mm.

NEW LOCKER ROOM AND KITCHEN FOR MEN. Supply and fit 115mm Nutec window sill.(12/1,511M) (2/1,02M)

NEW LOCKER ROOM AND KITCHEN. FOR MEN. Brake through existing face brick-wall (230mm) and Build 114mm steel door frame in without fanlight. (RH)

NEW LOCKER ROOM AND KITCHEN FOR MEN. Build E4H steel windows in with glass and putty.

NEW LOCKER ROOM AND KITCHEN FOR MEN.

Do beam filling under roof and gable ends.

(2/18,33m)(3/5,50m)

NEW KITCHEN FOR MEN. Cast concrete steps for new steel door outside kitchen

**EXISTING BUILDING: (East Side)** 

Brake concrete out behind existing building, and remove from site.

(1/11,50m longx1,74m widex76mm thick.) (1,52M3)

NEW LOCKER ROOM AND KITCHEN FOR MEN.

Plaster walls, in locker room steel troffel finishing, and in kitchen wood float finishing.

**NEW LOCKER ROOM FOR MEN:** 

Brake out old window sills it is face – bricks on edges. (2/1,02m) (2,04m)

## **CAPENTER:**

EXISTING ROOF: Remove corrugated iron, wood Purlins, Rafters, Hips, Valleys, Half Trusts, fascia boards, Ceilings, 3/Extractor fans, Condiut pipes and 8/Light fittings to make space for the new trusts. The 8 Light fittings and 3/Extractor fans must be install again.

<u>NEW ROOF:</u> Supply erect and fix 18 new full Gang- Nail Trusts +- 8,88m wide and +- 1,52m high on wall plate, fix it with wire roof anchors.

EXISTING BUILDING, NEW LOCKER ROOM AND KITCHEN FOR MEN.

Fix 114mmx38mm wood wall plate to walls.

(2/11,00m)(2/9,00m)

EXISTING BUILDING, NEW LOCKER ROOM AND KITCHEN FOR MEN. (2/5/22,00m)

Fix 50mmx76mm wood purling to trusts, with sceenail fixing, and 45 degrees mither joints. (Not But joints)

## EXISTING BUILDING, NEW LOCKER ROOM AND KITCHEN FOR MEN.

Fix Corrugated iron to wood purlins, with 65mm pozi-drive screws and 19mm Bonded washers. Corrugated iron. (2/29/5,60m Long)

EXISTING BUILDING, NEW LOCKER ROOM AND KITCHEN FOR MEN.

Fix 1,8m nock redging to nock, bend redging plate with ball head hammer, to block rain water.

EXISTING BUILDING, NEW LOCKER ROOM AND KITCHEN FOR MEN.

Fix 230mmx12mm Newtec fascia boards to sprockets with jointer plates and 40mm round head braas screws with braas washers. (2/22,00m)

EXISTING BUILDING NEW LOCKER ROOM AND KITCHEN FOR MEN.

Fix 230mmx12mm Newtec barch boards to gable ends with jointer plates and 40mm round head braas screws and braas washers. (3/5,50m)

LADIES AND MEN KITCHEN, MEN TWO LOCKER ROOMS AND SHOWERS.

Install NEWTEC Ceiling board, with Bishof Strips. Supply 800mmx800mm trap door in men shower room new locker room and ladies kitchen.(3T/doors) (1/3,30X2,90)(1/4,37X2,51)(1/8,66X5,00m) (1/8,66X6,00m)(1/4,05X6,88M)(4,37X4,25M)

LADIES AND MEN KITCHEN, MEN TWO LOCKER ROOMS AND SHOWERS.

Fix 76mm Rino Cornice to ceilings and walls.

(1/3,30m)(2/5,41m)(1/4,37m)(1/1,07m)(2/2/8,66m)

(2/6,00m)(2/5,00m)

LADIES KITCHEN AND NEW LOCKER ROOM FOR MEN.

Fix hard board doors to steel door frames.

NEW LOCKER ROOM FOR MEN.

Fix hard wood flash back meranti door to steel door frame.

LADIES KITCHEN AND NEW LOCKER ROOM FOR MEN. Fit and install two lever union mortice locks.

LADIES AND MEN KITCHEN, OLD LOCKER ROOM FOR MEN. Manufacture and install three steel security gates in three steel frames, and fix it to brick-walls with 65mm raulbolts. (Square tubing 25x25x2mm) (Round bars 10mm) (Mini ultralock 40mm) (65mm Butter-Fly Hinges Heavy Duty)

## PLUMBER:

## **LADIES AND MEN KITCHEN:**

Chase and install 22mm copper water pipes with copper fittings cold and hot in walls, do the installation complete.

#### LADIES AND MEN KITCHEN:

Install two sink waists, two rubber p- traps, 50mm PVC waist pipes and two Cobra Star Type Taps with goose neck.

## **LADIES AND MEN KITCHEN:**

Supply and fit 1,80mx870mm high steel cabinet unit with hinged doors and double stainless steel sink.

<u>LADIES AND MEN KITCHEN:</u> Supply and fit 1,80mx870mm high steel cabinet unit with four hinged doors and rack in middle of <u>cabinet</u>.

## MEN SHOWER ROOM GEYSER OUT SIDE:

Remove 200 liter geyser with controle valve, stopcock, vacuum breakers and isolater in to roof. Do all the plumbing and electrical work complete. Install a drip tray outlet and blanket for geyser.

## **LADIES AND MEN KITCHEN:**

(Transnet supply one 10 liter Hydro boil.) The Contractor supply another 10 liter and install two Hydro boils completely with two stopcocks.

## **MEN SHOWER ROOM AND LADIES KITCHEN:**

Remove all water pipes in ceiling, before the demolishing of roof.

## **MEN SHOWER ROOM:**

Remove wash hand baisin waist pipe 50mm PVC and put it in the new locker room floor. Do all the work completely.

## SEWERAGE OF BUILDING OUT SIDE:

Dig 30m long x 600mm wide x 800mm deep and open existing sewerage pipe, cut and extend pipe for 30m with new 110mm PVC. Do all the work completely.

## SEWERAGE OF BUILDING OUT SIDE:

Build a new manhole 230mm brick-wall with comman bricks. Plaster walls inside with steel troffel finishing and outside wood float finishing. Manhole frame and cover is 930mmx780mm. Cast concrete floor 76mm thick. Do 90\* benching in manhole with steel troffel finishing. Do 45\* benching outside around the cover and frame with wood float finishing.

## SEWERAGE OF BUILDING OUT SIDE MEN KITCHEN

Install a new cement gully with grit and S-Trap. Make a connection on 110mm sewerage pipe. Do all the work completely.

## WATER PIPES OF BUILDING OUT SIDE GALVENICE

Remove water connection to a new point and connect it again with a new 20mm stopcock. Remove existing stand pipe and tap to a new point.

## TWO TREES EAST OF THE BUILDIG:

Remove one tree 650mm diameter and 16m high.

Remove another tree 300mm diameter 9m high.

## **EXISTING AND NEW BUILDING: (GUTTERS)**

Install White Crome Adeck Gutters.(125mmx80mm)

(2/22,00m) With 4 Stop Ends. Supply old gutters 2 Stop ends.

**EXISTING AND NEW BUILDING: (DOWN PIPES)** 

Install White Crome Adeck down pipes.100x75mm.

# ELECTRICAL: ALL ELECTRICAL WORK MUST BE DONE ACCORDINGLEY TO MUNICIPALITY RULE'S AND SPECIFICATIONS.

## LADIES KITCHEN, MEN KITCHEN TWO LOCKER ROOMS AND SHOWER ROOM:

Supply two kitchens two Locker Rooms and shower room with <u>new</u> Wireing and <u>new</u> Condiut in walls and in roof. Install new <u>eight 1,2m</u> Flourescent light fittings Anti – Corrosive Double Tube Thorn Tech. Electronic, light switches and Globes in <u>new</u> locker room and <u>new</u> kitchen. Ladies kitchen and men old locker and shower room install the old 8/light fittings with G again with <u>new</u> light Switches. Install the old 3 Extractor fans with Switches. Do the lighting completely.

#### LADIES AND MEN KITCHEN:

Install <u>two</u> Isolators for Hydro boils, the wireing in Condiut pipe, and must be Chased in walls. (Do it before wall tiles.) Do all the wireing complete.

## LADIES AND MEN KITCHEN:

Remove old wall plugs. Men kitchen install <u>three</u> new wall plugs Crabtree Flush/Surface mounted 16A three pin and <u>three</u> in ladies kitchen. All the Condiut pipes must be Chased in walls. Do all the wireing for the wall plugs complete.

## **MEN SHOWER ROOM:**

Remove Extractor fans and install it again with new wireing and switches.

### **EXISTING D. B. BOARD:**

Install new Lockable Surface Mounted DB. Disconnect all the wireing, and Connect it on the new DB Board again. (Install new Circuit Breakers on new DB Board.)

## PAINTER:

## TWO LOCKER ROOMS FOR MEN AND TRANSTEL ROOM:

Paint raw interior walls 3 Coats paint.

1 Coat Dulux Dura 65 White.

2 Coats Dulux Wash N Wear Silk, Barely Beige.

(Code - 3H1-1.)

(2/8,66 x 2,88mhigh)(2/5,00 x 2,88mhigh)

(2/1,28 x 2,88mhigh)(1/1,29 x 2,88mhigh)

(2/4,37 x 2,88mhigh)(2/4,25 x 2,88mhigh)minus 29m2

LADIES AND MEN KITCHEN, TWO LOCKER ROOMS FOR MEN, AND SHOWERS FOR MEN AND LADIES.

Paint old and new ceilings and Cornice 3 Coats Dulux Dura 65 White.

## TWO KITCHENS, AND TWO LOCKER ROOMS.

Paint steel door frames 3 Coats paint.

1 Coat Dulux Universal White Undercoate.

2 Coats Dulux Pearlglo Lockness Code-3L1-5.

## TWO KITCHENS, AND TWO LOCKER ROOMS.

Paint wood doors 3 Coats paint.

1 Coat Dulux Universal White Undercoate.

2 Coats Dulux Pearlglo Lockness Code-3L1-5.

TWO KITCHENS, AND TWO LOCKER ROOMS.

Sand Hard Wood doors and 2 Coats Clear Varnish.

TWO KITCHENS, TWO LOCKER ROOMS AND MEN SHOWERS.

Paint Steel Windows 3 Coats paint.

1 Coat Dulux Universal White Undercoate.

2 Coats Dulux Pearlglo Lockness Code-3L1-5.

(12/1,511widex0,654mhigh)(2/1,02xwidex1,42mhigh)

(3/0,54 widex0,95m high)(1/1,03x1,24m high)

(1/1,50 widex0,95m high)(1/0,53 widex0,60m high)

(1/1,00 widex1,24m high)(3/0,54 widex0,95m high)

(1/1,03 widex1,24m high) (8,63m2)

### **EXTERIOR:**

Paint exterior plaster walls 2 Coats Weatherguard, Barely Beige Code 3H1-1.

(1/7,63X600mm)(1/1,72x600mm)(1/7,21x600mm)

(1/9,23x600mm)(1/15,00x600mm)(6/2,55x240mm)

(1/860mmx2,07m)(1/1,14x240mm)(1/1,40x240mm)

#### **EXTERIOR:**

Paint new wood Sprockets 114mmx38mm 3 Coats paint. (18 sprockets x 2 sides)

- 1 Coat Dulux Pink Wood Primer.
- 1 Coat Dulux Universal White Undercoat.
- 1 Coat Dulux White High Gloss.

### **EXTERIOR:**

Paint new wood Purlins 50mmx76mm 3 Coats paint. (22mx 2 sides)(300mm x 6/3 sides)

- 1 Coat Dulux Pink Wood Primer.
- 1 Coat Dulux Universal White Undercoat.
- 1 Coat Dulux White High Gloss.

### **EXTERIOR:**

Paint new Fascia Boards 230mmx12mm 3 Coats Dulux Dura 65 White. (2/22,00m)= 44,00m.

Paint new Barge Boards 230mmx12mm 3 Coats Dulux Dura 65 White. (3/5,50m)= **EXTERIOR:** 

Stencil Asset No 02AM061P in front of building on brick-wall. (Size 50mm high) **INTERIOR AND EXTERIOR:** 

Clean Building Inside and Out Site.

Clean Site.



## **BUILDINGS, BRIDGES & STRUCTURE**

POLOKWANE: RENOVATE SAND HOUSE AT DIESEL DEPOT, AS PER GENERAL AND TECHNICAL SPECIFICATIONS. (ASSET NO.02AM017P)

## **Schedule of work and prices**

Item	Description	Quant	Unit	Price	Amount
	•				
	BRICKLAYER:				
1	Demolish 230mm brick-wall in and outside sand	32	M2		
	house, remove all bricks to dumping side.				
	(1/2,70x1,70m high)(1/8,00x1,70m high)				
	(1/5,47x1,70m high)(1/1.00x1,70m high)			45	
2	(1/2,45x1,10m high)  Build openings close in 230mm brick-wall, use	4	MO	13.	
	commen bricks. (3/460mmx500mm)(1/1,00x0,90m)	4	<b>M2</b>		
	(1/0,50x0,40m)(4/0,50x0,50m)(1/0,95x0,70m)				
3	Back-Filling on floor in side building. Do back-filling	3	M3		
	with ground in150mm courses. Size of back-filling				
	is (1/6,73 x 1,55 x 300mm thick.)				
4	Excavate in medium soft soil 1/9,00x7,00x90mm deep.	6	M3		
5	In side sand house cast 100mm concrete floor with	11	<b>M2</b>		
	wood float finishing and one joint in middle of floor				
	(1/6,73x1,55x100m thick.) (1M3) Outside sand house cast 150mm concrete slab	20	7.70		
6	(25mpa) with wood float finishing, and every 3m a	63	<b>M2</b>		
	joint in concrete with nosing on edges. Supply and				
	fit steel mat 200mmx200mmx4mm thick in concrete.				
	(1/9,00x7,00x150mm thick) (10M3)				
7	In sand house plaster walls with wood float	2	M2		
	finishing. (2/1,10m highx300mm wide.)				
	(2/3/460mmx500mm)				
	CAPENTER:				
8	Install 230mmx10mm Newtec fascia board fix it to	18	M		
_	end Rafters. (2/7,70m)(1/1,70m) Install 5 Fascia board jointers 230mmx10mm.	_	TE A		
9		5	EA		
10	Remove steel board and erect it again.	1	JOB		
11	Remove corrugated sink with <u>TWO</u> holes in and	1	JOB		
42	replace with new sink.  Remove old roof screws and replace with 65mm	400	TF A		
12	Pozi-Drive screws and 20mm Bonded Washers.	400	EA		
13	PLUMBER: Remove sand-dry machine and diesel	1	JOB		
.0	tank with pipes included, it is Transnet Asset.	•	UOD		
	Contractor can remove it to Real Estate Depot.				
	(3km)				

14	Diesel Loko Polokwane.To install new 80mm	1	JOB		
	Stainless steel pipes and fittings for SAND TOWER.				
	This <u>Installation</u> must be done by a qualify Coded				
	Welder and Boiler Maker.				
	(42/80mm Sch 40 S/S Pipe)				
	(5/80mm S/S Long radius bend)				
	(24/80mm S/S Flanges)				
	(1Tot/Consumables)				
	(5/Gaskets)				
	(Price for Installation.)				
	(Price to build Scaffold.)				
	(Price for welding.)				
15	PAINTER: Paint exterior face brick walls 2 Coats	100	M2		
.	Weatherguard, Barely Beige Code 3H1-1.		1112		
	(2/5,88 X 3,60m)(2/7,70 x 3,60m)				
16	Paint steel windows 3 Coats paint.	4	EA	_	
10	1 Coat Dulux Universal White Undercoate.	7	LA	447	
	2 Coats Dulux Pearigio Lockness Code-3L1-5.				
	$(4/0.97 \times 0.98m) = 3.80m2.$			1	
17	Paint wood Sprockets 150mm x 76mm 3 Coats	36	M		
17	paint.	30	TXI		
	1 Coat Dulux Pink Wood Primer.				
	1 Coat Dulux Universal White Undercoat.				
	1 Coat Dulux White High Gloss.				
	(12/2/1,50m) = 36m.		<b>)</b>		
40	Paint new wood Purlins 50mmx76mm 3 Coats paint.	31	M		
18	1 Coat Dulux Pink Wood Primer.	31	M		
	1 Coat Dulux Pilik Wood Pilifier.  1 Coat Dulux Universal White Undercoat.				
	1 Coat Dulux Universal Write Order Coat.  1 Coat Dulux White High Gloss.				
	(4/7,70m) = 31m.				
40	Paint double steel door 4 Coats paint	4	E.4		
19	1 Coat Dulux Steel Primer. (NS4)	1	EA		
	1 Coat Dulux Steel Fillier. (NS4)  1 Coat Dulux Universal White Undercoate.				
	2 Coats Dulux Pearlglo Lockness Code-3L1-5.	4	3.72		
20	Paint window sills exterior 2 Coats Weatherguard,	1	<b>M2</b>		
	Barely Beige Code 3H1-1.				
	(4/0,97m x 0,22m) = 1m2	0.4	3.7	1	
21	Paint new Fascia Boards and Barge Boards	34	M		
	230mmx10mm 3 Coats Dulux Dura 65 White.				
	(4/4,70m)(2/7,70m) = 34m				
22	Paint Corrugated Iron Roof 3 Coats paint.	70	<b>M2</b>		
	1 Coat Dulux Primer-NS4 White.				
	2 Coats Dulux Roof Guard Cottage White Heat				
	Reflective paint.	_	7.00		
23	Stencil Asset No 02AM017P in front of building on	1	JOB		
	brick-wall. (Size 50mm high)	_			
24	Clean Site.	1	JOB		
			TOTA		
			L		
			<b>.</b>		
			14%		
		GRAN	TOTA		
		Т	L		

NAME OF THE COMPANY:

## **SPECIFICATION**

### **BRICKLAYER:**

Demolish 230mm brick-wall in and outside sand house, remove all bricks to dumping side.

(1/2,70x1,70m high)(1/8,00x1,70m high)

(1/5,47x1,70m high)(1/1.00x1,70m high)

(1/2,45x1,10m high)

Build openings close in 230mm brick-wall, use commen bricks. (3/460mmx500mm)(1/1,00x0,90m) (1/0,50x0,40m)(4/0,50x0,50m)(1/0,95x0,70m)

Back-Filling on floor in side building. Do back-filling with ground in 150 mm courses. Size of back-filling is  $(1/6,73 \times 1,55 \times 300 \text{ mm thick.})$ 

Excavate in medium soft soil 1/9,00x7,00x90mm deep.

In side sand house cast 100mm concrete floor with wood float finishing and one joint in middle of floor (1/6,73x1,55x100m thick.) (1M3)

Outside sand house cast 150mm concrete slab (25mpa) with wood float finishing, and every 3m a joint in concrete with nosing on edges. Supply and fit steel mat 200mmx200mmx4mm thick in concrete. (1/9,00x7,00x150mm thick) (10M3)

In sand house plaster walls with wood float finishing. (2/1,10m highx300mm wide)(2/3/460mmx500mm)

## **CAPENTER:**

Install 230mmx10mm Newtec fascia board fix it to end Rafters. (2/7,70m)(1/1,70m)

Install 5 Fascia board jointers 230mmx10mm.

Remove steel board and erect it again.

Remove corrugated sink with TWO holes in and replace with new sink.

Remove old roof screws and replace with 65mm Pozi-Drive screws and 20mm Bonded Washers.

#### **PLUMBER:**

Remove sand-dry machine and diesel tank with pipes included, it is Transnet Asset. Contractor can remove it to Real Estate Depot. (3km)

Diesel Loko Polokwane. To install new 80mm Stainless steel pipes and fittings for SAND TOWER. This <u>Installation</u> must be done by a qualify Coded Welder and Boiler Maker.

(42/80mm Sch 40 S/S Pipe)

(5/80mm S/S Long radius bend)

(24/80mm S/S Flanges)

(1Tot/Consumables)

(5/Gaskets)

(Price for Installation.)

(Price to build Scaffold.)

(Price for welding.)

## PAINTER:

Paint exterior face brick walls 2 Coats Weatherguard, Barely Beige Code 3H1-1.

(2/5,88 X 3,60m)(2/7,70 x 3,60m)

Paint steel windows 3 Coats paint.

1 Coat Dulux Universal White Undercoate.

2 Coats Dulux Pearlglo Lockness Code-3L1-5.

 $(4/0,97 \times 0,98m) = 3,80m2.$ 

Paint wood Sprockets 150mm x 76mm 3 Coats paint.

1 Coat Dulux Pink Wood Primer.

1 Coat Dulux Universal White Undercoat.

1 Coat Dulux White High Gloss.

(12/2/1,50m) = 36m.

Paint new wood Purlins 50mmx76mm 3 Coats paint.

- 1 Coat Dulux Pink Wood Primer.
- 1 Coat Dulux Universal White Undercoat.
- 1 Coat Dulux White High Gloss.

(4/7,70m) = 31m.

Paint double steel door 4 Coats paint.

- 1 Coat Dulux Steel Primer. (NS4)
- 1 Coat Dulux Universal White Undercoate.
- 2 Coats Dulux Pearlglo Lockness Code-3L1-5.

Paint window sills exterior 2 Coats Weatherguard, Barely Beige Code 3H1-1.

 $(4/0,97m \times 0,22m) = 1m2$ 

Paint new Fascia Boards and Barge Boards 230mmx10mm 3 Coats Dulux Dura 65 White. (4/4,70m)(2/7,70m) = 34m

Paint Corrugated Iron Roof 3 Coats paint.

- 1 Coat Dulux Primer-NS4 White.
- 2 Coats Dulux Roof Guard Cottage White Heat Reflective paint.

Stencil Asset No 02AM017P in front of building on brick-wall. (Size 50mm high) Clean Site.



#### GENERAL CONDITIONS OF CONTRACT (PETTY CONTRACT)

- 1. The Contractor shall carry out the work in accordance with the attached Contract Specifications and in a thorough and workmanlike manner. The final acceptance of the work rests with Transnet's designated manager.
- 2. The Contractor shall supply all necessary labour, tools, equipment and material.
- 3. Should Transnet provide or make available any material and/or equipment, the Contractor shall be responsible for the correct and economical transport, storage and usage thereof. The cost of any loss or damage to Transnet equipment other than through normal wear and tear, and any uneconomical usage or loss of material provided by Transnet, will be recovered from the Contractor.
- 4. Should the Contractor fail to complete the work by the date or within the period stipulated in this agreement or by such extended date as may be allowed by Transnet in terms of clause 8, he shall pay to Transnet as penalties in terms of the Conventional Penalties Act of 1962 (as amended) the amount stated in the Tender Enquiry/Contract Document for each day or part thereof during which the work remains uncompleted.

Application for relief from the obligation to pay a penalty will only be considered by Transnet if the Contractor can prove to the reasonable satisfaction of Transnet that the penalty is out of proportion to the prejudice suffered by Transnet by reason of the act or omission in respect of which the penalty was stipulated.

- 5. No transport concessions will be allowed.
- 6. The obligation to take care of and protect the contract work and everything connected therewith shall rest solely with the Contractor who shall take all necessary precautions to protect the public, the property of the public, and the property and personnel of Transnet and all other persons from damage or injury, and to protect adjoining properties from trespass or damage during the progress of the work.

The risk of physical loss of or damage to the contract work, temporary works, materials and equipment to be incorporated into the works shall be borne by the Contractor and he shall arrange such insurances as may be necessary for the protection thereof.

Transnet will, in the case where a risk of legal liability for accidental death of or injury to third party persons and/or accidental loss of or damage to third party property may arise out of the carrying out of the contract work, arrange for such public liability insurance in the joint names of Transnet and the Contractor as is deemed necessary by Transnet.

The Contractor shall be responsible for obtaining insurance against loss of or damage to his own machinery tools, equipment, materials and site establishment and any consequential financial losses arising from such damage. The Contractor shall likewise arange his own insurances in respect of motor vehicle liability and common law liabilities of the Contractor as an employer.

- 7.a) The Contractor shall comply with the Occupational Injuries and Diseases Act. (Act 130 of 1993) and any amendment thereof.
- 7.b) \* (i) The Contractor shall observe and comply with the provisions of the Explosives Act. No. 26 of 1956 and any amendment thereof and with any regulations framed hereunder.
  - (ii) Blasting in the weinity of open lines will be permitted only during intervals between trains. It will be controlled by a person appointed by Transnet, who will be in telephonic communication with the nearest station and whose instructions the Contractor shall carry out implicitly. The Contractor shall have labour available to clear any stones or debris deposited on the track by blasting and to repair any damage to the track immediately after occurrence thereof.

#### (\* Delete if not applicable.)

- 7.c) The Contractor shall comply with the Occupational Health and Safety Act (Act No. 85 of 1993). The Contractor is, in terms of section 37(2) of Act 85 of 1993 deemed to be an employer in his own right with duties as prescribed in the said Act and agrees to ensure that all work will be performed or machinery and plant used in accordance with the provisions of the Act in respect of all persons in his employ, other persons on the premises or the site or place of the works or on the works to be executed by him and under his control in terms of the contract. The agreements in this contract and all documents attached or referred to, form an integral part of the arrangements and procedures mentioned in the aforementioned section.
- 7.d) The Contractor also undertakes to comply with any safety requirements of Transnet, as adopted from time to time, and instructed by the relevant project leader.
- 7.e) The Contractor shall at his own costs comply with the provisions of all such laws, Provincial Ordinances, Local Authority Bylaws and all relevant Regulations framed there under which are applicable to the work to be undertaken.

- 8. If the Contractor suffers delay or incurs extra expense as the result of delay on the part of Transnet in supplying such materials as are to be provided by it, or from any other cause, the Contractor shall inform Transnet within 48 hours of the commencement of the delay, and may, within 14 days after such delay has ended, apply in writing to Transnet for extra time and/or extra payment and Transnet shall after investigation grant such extension of time and/or authorise payment of such sum as is considered reasonably adequate to cover the delay or to compensate for the extra direct expense suffered by the Contractor. Transnet will grant such extension of time and/or authorise the payment of such sum, as it considers adequate to cover the delay suffered or to compensate the Contractor.
- 9. The Contractor shall not assign his obligations under the contract, nor sublet the contract work or any part thereof without the written consent of the Manager. Breach of this condition will entitle Transnet to cancel the contract forthwith.
- 10. Any amount certified by the Manager as being recoverable from the Contractor in terms of any of the preceding clauses may, without prejudice to any other legal rights which Transnet may have, be deducted from any moneys due to the Contractor by Transnet whether under this contract or from any source whatsoever.
- 11. On completion of the work, the Contractor shall inform the Manager who will arrange a final inspection. If the work has been completed to his satisfaction, the Manager will issue a Certification of Completion and arrange payment of all moneys due to the Contractor by Transnet.

Except where expressly agreed to the contrary with Transnet, the Contractor requests and authorises Transnet to send any amount due to him by registered post to his known postal address or any other address requested in writing by the Contractor. The Contractor declares that the SA Post Office Limited acts as his representative and that the risk that such payment does not reach him after it has been sent by post lies totally with the Contractor.

- 12. Transnet may order alterations, extras, additions to or omissions from the works. The Contractor shall carry out or give effect to such orders from Transnet. The rates for such work shall be agreed between the Contractor and Transnet and where possible rates quoted in the schedule of work and prices shall form the basis, as far as may be reasonable, of such agreement.
- 13. If a dispute of any kind arises between the Contractor and any member of Transnet personnel in connection with the contract, the matter shall be referred to the designated Manager. The Manager shall decide the dispute and advise the Contractor accordingly.

The Manager's decision shall be final and binding upon the parties unless the Contractor has within 4 days of the date thereof, notified Transnet in writing of his dispute of the decision, in which case the matter shall be referred to a pitration.

Such arbitration shall be by a single arbitrator who shall be selected by agreement between the parties or, failing such agreement, nominated on application of either party by the Chairperson for the time being of the Association of Arbitrators of South Africa.

The Arbitrator shall have unfettered discretion and jurisdiction to decide the procedure of the arbitration and the matter in dispute and his award shall be final and binding on the parties hereto.

"Transnet insists on honesty and integrity beyond reproach at all times and will not tolerate any form of improper influencing, bribery, corruption, fraud, or any other unethical conduct on the part of bidders/Transnet employees. If, in the opinion of Transnet's Chief Operating Officer, a tenderer / contractor / supplier has or has caused to be promised, offered or given to any Transnet employee, any bribe, commission, gift, loan, advantage or other consideration, Transnet shall be entitled to revoke the tender / contract by following its internal policies that govern the Exclusion process. In such an event Transnet will be entitled to place any Tenderer / Contractor / Supplier who has contravened the provisions of Transnet's business ethics on its List of Excluded Tenderer's. This list will also be distributed to all other State Owned Enterprises and Government Departments.

Transnet invites its valued suppliers to report any allegations of fraud, corruption or other unethical activities to Transnet Tipp-offs Anonymous, at any of the following addresses/contact numbers:-

Toll-free anonymous hotline- 0800 008 056 Email – <u>Transnet@tip-offs.com</u> Fax number – 0800 007 788 Freepost DN298, Umhlanga Rocks, 4320

Confidentiality is guaranteed."



(REGISTRATION NO. 90/000900/06)
TRADING AS TRANSNET FREIGHT RAIL

RFQ- NO.: CRAC-POE-8861

## RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

### **NOTICE TO TENDERERS**

# TENDERS ARE INVITED FOR THE:RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

1. On or after <u>16 JULY 2012</u> tender documents may be inspected at and are obtainable from the, Transnet Freight Rail, Tender Advice Centre, Ground Floor, Inyanda House 1, 21 Wellington Road, Parktown,

NOTE: No facsimile tenders/quotations will be accepted.

- 2. A site inspection can be arranged by contacting Mr. Henry De Villiers Tel: 083 303 6245
- 3. Tenders must reach the Secretary, Transnet Freight Rail, Acquisition Council, Ground Floor, Inyanda House 1, 21 Wellington Road, Parktown, Johannesburg before the closing hour on the date shown below, and must be enclosed in a sealed envelope which must have inscribed on the outside:
  - (a) Tender No. CRAC-POE-8861
  - (b) Description of work. : RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P
    - (c) Closing date of tender.: <u>07 AUGUST 2012</u>
  - 4. If posted, the envelope must be addressed to the Chairperson, TRANSNET Freight Rail Acquisition Council, P.O. Box 4244, Johannesburg 2000 and must be dispatched in time for sorting by the Post Office to reach this office before the closing time of the tender. In the event of the late receipt of a tender, the Tenderer's franking machine impression will not be accepted as proof that the tender was posted in time.
  - 5. If delivered by hand, the envelope must be addressed to the Secretary, Transnet Freight Rail, Acquisition Council, Ground Floor, Inyanda House 1, 21 Wellington Road, Parktown, Johannesburg, and handed in at this address before the closing time during the following office hours:

Mondays to Fridays: 07:30 to 12:45-13:30 to 15:50

- 6. Please note that this tender closes punctually at 10:00 on \_07 AUGUST 2012
- 7. If tenders are not posted or delivered as stipulated herein, such tenders will not be considered and will be returned as "late" tenders.

- 8. Any telegraphic or telex tender stating clearly therein the tender number, name of Tenderer, the service and the amount of the tender, must be dispatched in time for delivery to the destination by the South African Post Office Limited before the closing hour of the tender, and be confirmed by the submission of the official tender documents posted or delivered by courier not later than the day before the closing date of the tender.
- 9. N/A
- 10. Telegraphic or telex tenders from sources outside the Republic of South Africa will be considered on the aforementioned conditions, provided that the confirmation is forwarded by the quickest means, viz., by airmail where possible.
- 11. Transnet does not bind itself to accept the lowest or any tender/quotation nor will it disclose the successful tenderer's tender price or any other tendered prices, as this is regarded as confidential information, moreover Transnet reserves the right to accept the whole or part of a tender. Transnet also reserve the right to negotiate terms and conditions with all, or a short listed group of contenders, should it be deemed necessary.
  - All unsuccessful Tenderers will, however, on award of business to the successful Tenderer, be informed of the reason for the rejection of their tender, for example, price, quality, delivery period, etc.
- 12. Envelopes must not contain documents relating to any tender other than that shown on the envelope.
- 13. No slips are to be attached to the tender documents. Any additional conditions must be embodied in an accompanying letter. Alterations, additions or deletions must not be made by the Tenderer to the actual tender documents.
- 14. The attention of Tenderers is directed to all the various documents comprising these tender documents and including, inter alia, General Conditions of Contract, Special Conditions of Contract and Specifications and Bills and/or Schedule of Quantities and/or Prices. Particular attention must be given to
  - Clauses 6, 25 and 26 of the General Conditions of Contract (Minor Works) (Transnet 287) and other clauses dealing with sufficiency of tenders and terms of payment which will be applicable to the contract to be concluded as a consequence of this tender enquiry.
- 15 Unless otherwise stated in any of these tender documents, Tenderers are required to submit an offer, complete in every respect and fully in compliance with the specifications. If, in a Tenderer's opinion, justification exists for the submission of one or more alternative tender(s) such offer(s) must, as in the case of the main tender(s), be completed in every respect.
- The attention of Tenderers is also directed to the General Conditions of Contract, in terms of which Transnet Limited will effect and pay for insurance of the WORKS and/or Public Liability (third party) Insurance.
- 17 N/A
- Tenderers are required to give a list of major items of plant and/or equipment to be used in the execution of the WORKS and must complete the plant statement E.4D **where this is attached to the tender documents.**

- 19 No tender will be considered unless certificate E.4A is signed by the tenderer stating that he has acquainted himself with the contract documents.
- 20 Tenderers must furnish proof that they have had actual experience in the class of work for which
- 21 they are tendering and must submit with the tender, on form E4c, a statement of works recently and successfully carried out.
- Tenders will be opened in public as soon as practicable after the expiry of the time advertised for receiving them and the name of each Tenderer will be read out.
- Tenderers are warned that a tender will be liable to disqualification should any attempt be made by a Tenderer either directly or indirectly to canvass any officer(s) or employees of Transnet Limited in respect of a tender between the date the tender is submitted and the date of the award.
- A Tenderer may, however, at any time communicate with the Tender Advise Centre, at telephone no. (011) 584-9231 on any matter relating to his tender.
- When a Tenderer has been notified by telegraph or letter of the acceptance of his tender the South African Post Office Limited and/or Telkom SA Limited shall be regarded as the agent of the Tenderer, and delivery of such acceptance to the South African Post Office Limited and/or Telkom SA Limited shall be considered as delivery to the Tenderer unless the Tenderer should indicate to the contrary in any letter accompanying the tender.
- Compliance of tender(s) with Transnet's Limited requirements is the sole responsibility of the Tenderer and any costs incurred in subsequent modifications to or replacement of equipment accepted by Transnet Limited in good faith on the grounds of certified compliance with specified standards by the contractor and in fact found to be inadequate in such respects, will be to the relevant Tenderer's account.
- 27 Tenderers shall give a clause by-clause comment as to whether or not their tender complies. If not, how it differs from the specification(s). Failure to do so may preclude a tender from consideration.
- The attention of Tenderers is particularly directed to the necessity to complete the "Labour Payment Schedule", "The Tender form" and "Resolution of Board of Directors", where these documents are included in the tender.
- 29 Tenders submitted by Tenderers must be neatly bound and the inclusion of loose documents must be avoided.
- Tenderer's must state in their tenders the percentage, of the total contract value, that will be allocated to previously disadvantaged/underprivileged enterprises and /or communities in the vicinity where contract works are to be executed, should they be successful in winning this tender. A breakdown of the distribution of the aforementioned percentage must also be furnished.
- It is specifically recorded that this contract is awarded to the contractor/supplier on the unequivocal understanding by the parties that



- 31.1 black and/or BEE contractors/suppliers shall for purpose of this contract mean South African companies (business entities) owned by, or in part owned by, South African citizens of African, Coloured or Indian origin;
- 31.2 the black ownership constitutes \_\_\_\_\_ percent (%) of the business concern of the contractor/supplier;
- 31.3 the contractor/supplier shall furnish proof of 30.2 above to Transnet;
- 31.4 the contractor/supplier has familiarized itself with Transnet's Black Economic Empowerment Policy and undertakes to abide by the requirements thereof during the currency of this contract;
- should the aforesaid degree of black ownership, at any time after the awarding of the contract, change, and this change reflects a decrease from that specified in the sub-clause 30.2, above, then and in such event the contractor/supplier, shall be obliged to inform Transnet (Freight Rail) thereof in writing within two (2) weeks of such change. Failure on the part of the contractor/supplier to do so shall constitute a material breach of the contract which shall entitle Transnet (Freight Rail) to unilaterally cancel the contract and enforce such other rights as it may in law have arising out of such breach of contract; and
- in the event of the black ownership of the contractor/supplier being changed and the contractor/supplier duly informing Transnet (Freight Rail) thereof in accordance with Sub-clause 30.5 above, then Transnet (Freight Rail) shall have the right to (1) continue with the contract on the same terms and conditions, or (2) propose such amendments as it may deem fit for the remaining period of the contract or (3) resile from the contract.
- Transnet fully endorses and supports the Government's Black Economic Empowerment Programme. We are strongly of the pinion that all South African Business Enterprises have an obligation to redress the imbalances of the past and Transnet will therefore prefer to do business with local business enterprises, which share these same values. To this end Transnet will seriously reconsider continued business relationships with such local business enterprises who do not at least have a 26% Shareholding by previously disadvantaged individuals/groups, or who are not prepared to channel at least 26% of the contract value to such BEE Companies by means of legitimate sub-contracting or JV agreements. Transnet therefore reserves the right to request documentary proof of such BEE empowerment endeavors and to verify and monitor that such endeavors in fact materialize into real development and upliftment of the historically disadvantaged individuals and groups.



ANNEXURE TO TENDER FORM E.4 (NOV.96)

## <u>Tender No.: CRAC-POE-8861</u> <u>(To be completed by tenderers)</u>

NAMES OF DIRECTORS OF COMPANIES/MEMBERS OF CLOSE CORPORATIONS OR PARTNERS OF PARTNERSHIPS

Tenderers must disclose hereunder the full name/s and address/es of the directory's of the company, member/s of the close corporation or partner/s of the partnership on whose behalf the tender is submitted.

Registration number of *company/clos	se corpor	ation/partne	rship: -	7/	
Date of incorporation: -		1	O,		
NB. IT IS COMPULSORY IN THE	CASE	OF A FEMA	IE DIREC		BED OD
PARTNER TO FURNISH HE		EIN MAIVIE	AND IF A	APPLICADI	LE, NEN
PREVIOUS MARRIED NAMES	_				
FULL NAME OF DIRECTOR/MEMBE	ER OR PA	<u> ARTNER</u> : -	<u>ADDI</u>	<u>RESS</u> :	
		_			
Is there any family as direct relations			ha aharra n		dinastana
Is there any family or direct relations				ientionea c	arrectors
members or partners and any employe	e of Tran	snet Limited:	' :-		
* YES/NO If so, full partic separately.	culars of	such relati	onship sh	ould be f	urnished
Failure to furnish all or correct information	ation ma	v lead to the	disqualifica	ation of a to	ender If
the space is insufficient for all the relevinformation separately.					
• •					
SIGNATURE OF TENDERER/S	:				-
ADDRESS OF REGISTERED OFFICE	:				
DATE:					-
* (Delete whichever is not applicable)	-				



## TRANSNET LIMITED

(REGISTRATION NO. 90/000900/06)

#### TRADING AS TRANSNET FREIGHT RAIL

**TENDER No: CRAC-POE-8861** 

### RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

# **RESOLUTION OF BOARD OF DIRECTORS**

Name of firm			
It was resolved at a meetin	g of the Board of Directo	ors held on	that
FULL NAME(S)		SIGNAT	URE
		Ö,	
in his/her/their capacity of sign and execute and comgoods and services.			by authorised to enter into, Contracts for the supply of
FULL NAME		Confirm: DATE	<del></del>
2			CHAIRMAN
FULL NAME  Certified true copy:			SECRETARY
SIGNED AT	ON THIS	DAY OF	20
		COMMISSIO	NER OF OATHS



(E4A (August 1996)

# 2. <u>CERTIFICATE OF ACQUAINTANCE WITH CONTRACT DOCUMENTS</u>

I/We	do
, , , , , , , , , , , , , , , , , , ,	If/ourselves with the E5, E5 (MW) or E160 ontract and specifications, and bills of quanti-
ties/schedule of quantities/schedule of price	ces, together with the drawings enumerated arrying out of the proposed works for which
I/we submitted my/our tender.	arying out of the proposed works for which
I/We furthermore agree that Transnet will re	ecognize no claim from me/us for relief based
on an allegation that I/we overlooked any te	nder condition or failed to take it into account
for the purpose of calculating my/our tender	prices or otherwise.
SIGNED at on t	his day of 2012 .
WITNESS:	
	TENDERER(S)



#### **SECTION 5**

#### **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

#### RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

## SAFETY ARRANGEMENTS AND PROCEDURAL COMPLIANCE WITH THE OCCUPATIONAL HEALTH AND SAFETY ACT (ACT 85 OF 1993) AND APPLICABLE REGULATIONS

#### 1. General

- 1.1 The Contractor and Transnet Limited (hereinafter referred to as "Transnet") are individual employers, each in its own right, with their respective duties and obligations set out in the Occupational Health and Safety Act, Act 85 of 1993 (the Act) and applicable Regulations.
- 1.2 The Contractor accepts, in terms of the General Conditions of Contract and in terms of the Act, his obligations as an employer in respect of all persons in his employ, other persons on the premises or the Site or place of work or on the work to be executed by him, and under his control. He shall, before commencement with the execution of the contract work, comply with the provisions set out in the Act, and shall implement and maintain a Health and Safety Plan as described in the Construction Regulations, 2003 and as approved by Transnet, on the Site and place of work for the duration of the Contract.
- 1.3 The Contractor accepts his obligation to complying fully with the Act and applicable Regulations notwithstanding the omission of some of the provisions of the Act and the Regulations from this document.
- 1.4 Transnet accepts, in terms of the Act, its obligations as an employer of its own employees working on or associated with the site or place of work, and the Contractor and Technical Officer or his deputy shall at all times, co-operate in respect of the health and safety management of the site, and shall agree on the practical arrangements and procedures to be implemented and maintained during execution of the Works.
- 1.5 In the event of any discrepancies between any legislation and this specification, the applicable legislation will take precedence.

#### 2. Definitions

- 2.1 In this Specification any word or expression to which a meaning has been assigned in the Construction Regulations, shall have the meaning so assigned to it, unless the context otherwise indicates: -
- 2.2 The work included in this Contract shall for the purposes of compliance with the Act be deemed to be "Construction Work", which, in terms of the Construction Regulations, 2003 means any work in connection with: -

- (a) the erection, maintenance, alteration, renovation, repair, demolition or dismantling of or addition to a building or any similar structure;
- (c) the installation, erection, dismantling or maintenance of fixed plant where such work includes the risk of a person falling;
- (d) the construction, maintenance, demolition or dismantling of any bridge, dam, canal, road, railway, runway, sewer or water reticulation system or any similar civil engineering structure; or
- (e) the moving of earth, clearing of land, the making of an excavation, piling, or any similar type of work;
- 2.3 "competent person" in relation to construction work, means any person having the knowledge, training and experience specific to the work or task being performed: Provided that where appropriate qualifications and training are registered as per the South African Qualifications Authority Act, 1995 these qualifications and training shall be deemed to be the required qualifications and training;
- 2.4 "contractor" means principal contractor and "subcontractor" means contractor as defined by the Construction Regulations, 2003.
- 2.5 **"fall protection plan"** means a documented plan, of all risks relating to working from an elevated position, considering the nature of work undertaken, and setting out the procedures and methods applied to eliminate the risk.
- 2.6 **"health and safety file"** means a file, or other record in permanent form, containing the information required to be kept on site in accordance with the Act and applicable Regulations;
- 2.7 **"Health and Safety Plan"** means a documented plan which addresses the hazards identified and include safe work procedures to mitigate, reduce or control the hazards identified:
- 2.8 "Risk Assessment" means a programme to determine any risk associated with any hazard at a construction site, in order to identify the steps needed to be taken to remove, reduce or control such hazard;
- 2.9 "the Act" means the Occupational Health and Safety Act No. 85 of 1993.

## 3. Procedural Compliance

- 3.1 The Contractor who intends to carry out any construction work shall, before carrying out such work, notify the Provincial Director in writing if the construction work:-
  - (a) includes the demolition of a structure exceeding a height of 3 metres; or
  - (b) includes the use of explosives to perform construction work; or
  - (c) includes the dismantling of fixed plant at a height greater than 3m,

and shall also notify the Provincial Director in writing when the construction work exceeds 30 days or will involve more than 300 person days of construction work and if the construction work:-

- (a) includes excavation work deeper than 1m; or
- (b) includes working at a height greater than 3 metres above ground or a landing.
- 3.2 The notification to the Provincial Director shall be on a form similar to Annexure A of the Construction Regulations, 2003, also shown in Annexure 1 of this Specification. The Contractor shall ensure that a copy of the completed notification form is kept on site for inspection by an inspector, Technical Officer or employee.
- 3.3 The Contractor shall, in accordance with the Act and applicable Regulations, make all the necessary appointments of competent persons in writing on a form similar to Annexure 2 of this Specification and deliver copies thereof to the Technical Officer. Copies should also be retained on the health and safety file.
- 3.4 Subcontractors shall also make the above written appointments and the Contractor shall deliver copies thereof to the Technical Officer.
- 3.5 In the case of a self-employed Contractor or any subcontractor who has the appropriate competencies and supervises the work himself, the appointment of a construction supervisor in terms of regulation 6.1 of the Construction Regulations, 2003 will not be necessary. The Contractor shall in such a case execute and sign a declaration, as in Annexure 3, by which he personally undertakes the duties and obligations of the "Chief Executive Officer" in terms of section 16(1) of the Act.
- 3.6 The Contractor shall, before commencing any work, obtain from the Technical Officer an access certificate as in Annexure 4 executed and signed by him, permitting and limiting access to the designated site or place of work by the Contractor and any subcontractors under his control.
- 3.7 Procedural compliance with Act and Regulations, as above, shall also apply to any subcontractors as employers in their own right. The Contractor shall furnish the Technical Officer with full particulars of such subcontractors and shall ensure that they comply with the Act and Regulations and Protekon's safety requirements and procedures.

### 4. Special Permits

Where special permits are required before work may be carried out such as for hotwork, isolation permits, work permits and occupations, the Contractor shall apply to the Technical Officer or the relevant authority for such permits to be issued. The Contractor shall strictly comply with the conditions and requirements pertaining to the issue of such permits.

#### 5. Health and Safety Programme

- 5.1 The Tenderer shall, with his tender, submit a Health and Safety Programme setting out the practical arrangements and procedures to be implemented by him to ensure compliance by him with the Act and Regulations and particularly in respect of: -
  - (i) The provision, as far as is reasonably practical, of a working environment that is safe and without risk to the health of his employees and subcontractors in terms of section 8 of the Act;

- (ii) the execution of the contract work in such a manner as to ensure in terms of section 9 of the Act that persons other than those in the Contractor's employment, who may be directly affected by the contract work are not thereby exposed to hazards to their health and safety;
- (iii) ensuring, as far as is reasonably practical, in terms of section 37 of the Act that no employee or subcontractor of the Contractor does or omits to do any act which would be an offence for the Contractor to do or omit to do.
- 5.2 The Contractor's Health and Safety Programme shall be based on a risk assessment in respect of the hazards to health and safety of his employees and other persons under his control that are associated with or directly affected by the Contractor's activities in performing the contract work and shall establish precautionary measures as are reasonable and practical in protecting the safety and health of such employees and persons.
- 5.3 The Contractor shall cause a risk assessment contemplated in clause 5.2 above to be performed by a competent person, appointed in writing, before commencement of any Construction Work and reviewed during construction. The Risk Assessments shall form part of the Health and Safety programme to be applied on the site and shall include at least the following:
  - (a) The identification of the risks and hazards that persons may be exposed to;
  - (b) the analysis and evaluation of the hazards identified;
  - a documented Health and Safety Plan, including safe work procedures to mitigate, reduce or control the risks identified.
    - (d) a monitoring and review plan.
- 5.4 The Health and Safety Plan shall include full particulars in respect of: -
  - (a) The safety management structure to be instituted on site or place of work and the names of the Contractor's health and safety representatives and members of safety committees where applicable;
    - (b) the safe working methods and procedures to be implemented to ensure the work is performed in compliance with the Act and Regulations;
  - (c) the safety equipment, devices and clothing to be made available by the Contractor to his employees;
  - (d) the site access control measures pertaining to health and safety to be implemented;
  - (e) the arrangements in respect of communication of health and safety related matters and incidents between the Contractor, his employees, subcontractors and the Technical Officer with particular reference to the reporting of incidents in compliance with Section 24 and General Administrative Regulation 8 of the Act and with the pertinent clause of the General Conditions of Contract forming part of the Contract and
  - (f) the introduction of control measures for ensuring that the Safety Plan is maintained and monitored for the duration of the Contract.

- 5.4 The Health and Safety programme shall be subject to the Technical Officer's approval and he may, in consultation with the Contractor, order that additional and/or supplementary practical arrangements and procedures be implemented and maintained by the Contractor or that different working methods or safety equipment be used or safety clothes be issued which, in the Technical Officer's opinion, are necessary to ensure full compliance by the Contractor with his obligations as an employer in terms of the Act and Regulations. The Technical Officer or his deputy shall be allowed to attend meetings of the Contractor's safety committee as an observer.
- 5.5 The Contractor shall take reasonable steps to ensure that each subcontractor's Health and Safety Plan is implemented and maintained on the construction site: Provided that the steps taken shall include periodic audits at intervals mutually agreed to between them, but at least once every month.
- 5.6 The Contractor shall stop any subcontractor from executing any construction work, which is not in accordance with the Contractor's, and/or subcontractor's Health and Safety Plan for the site or which poses a threat to the health and safety of persons.
- 5.7 The Contractor shall ensure that a copy of the Health and Safety Plan is available on site for inspection by an inspector, Technical Officer, agent, subcontractor, employee, registered employee organisation, health and safety representative or any member of the health and safety committee.
- 5.8 The Contractor shall consult with the health and safety committee or, if no health and safety committee exists, with a representative group of employees, on the development, monitoring and review of the Risk Assessment.
- 5.9 The Contractor shall ensure that all employees under his control are informed, instructed and trained by a competent person regarding any hazard and the related work procedures before any work commences, and thereafter at such times as may be determined in the Risk Assessment.
- 5.10 The Contractor shall ensure that all subcontractors are informed regarding any hazard as stipulated in the Risk Assessment before any work commences, and thereafter at such times as may be determined in the Risk Assessment.
- 5.11 The Contractor shall ensure that all visitors to a construction site undergoes health and safety induction pertaining to the hazards prevalent on the site and shall be provided with the necessary personal protective equipment.

### 6. Fall Protection Plan

- 6.1 In the event of the risk and hazard identification, as required in terms of clause 5.3 of this Specification, revealing risks relating to working from an elevated position the contractor shall cause the designation of a competent person, responsible for the preparation of a fall protection plan;
- 6.2 The Contractor shall implement, maintain and monitor the fall protection plan for the duration of Contract. The Contractor shall also take such steps to ensure the continued adherence to the fall protection plan.
- 6.3 The fall protection plan shall include:-

# TRANSNET

- (a) A Risk Assessment of all work carried out from an elevated position;
- (b) the procedures and methods to address all the identified risks per location;
- (c) the evaluation of the employees physical and psychological fitness necessary to work at elevated positions;
- (d) the training of employees working from elevated positions; and
- (e) the procedure addressing the inspection, testing and maintenance of all fall protection equipment.

#### 7. Hazards and Potential Hazardous Situations

The Contractor and the Technical Officer shall immediately notify one another of any hazardous or potentially hazardous situations which may arise during performance of the Contract by the Contractor or any subcontractor and, in particular, of such hazards as may be caused by the design, execution and/or location and any other aspect pertaining to the contract work.

## 8. Health and Safety File

- 8.1 The Contractor shall ensure that a health and safety file is opened and kept on site and shall include all documentation required as per the Act and applicable regulations, and made available to an inspector, the Technical Officer, or subcontractor upon request.
- 8.2 The Contractor shall ensure that a copy of the both his Health and Safety Plan as well as any subcontractor's Health and Safety Plan is available on request to an employee, inspector, contractor or the Technical Officer.
- 8.3 The Contractor shall hand over a consolidated health and safety file to the Technical Officer upon completion of the Construction Work and shall in addition to documentation mentioned in the Act and applicable Regulations include a record of all drawings, designs, materials used and other similar information concerning the completed structure.

# ANNEXURE 1

# OCCUPATIONAL HEALTH AND SAFETY ACT, 1993

# Regulation 3(1) of the Construction Regulations

# NOTIFICATION OF CONSTRUCTION WORK

1(a)	Name and postal address of principal contractor:	
(b)	Name and tel. no of principal contractor's contact person:	
2.	Principal contractor's compensation registration number:	
3.(a	Name and postal address of client: TFR PRODUCTION MANAGER, PROPERTY TECHNICAL JOHANNESBURG	
(b)	Name and tel no of client's contact person or agent: Henry De Villiers Mobile: 083 303 6245	
4.(a	Name and postal address of designer(s) for the project:	
(b	Name and tel. no of designer(s) contact person:	
5.	Name and telephone number of principal contractor's construction supervisor on site appointed in terms of regulation 6(1).	
6.	Name/s of principal contractor's construction sub-ordinate supervisors on site appointed in terms of regulation 6(2).	
7.	Exact physical address of the construction site or site office:	
8.	Vature of the construction work:	
9.	Expected commencement date:	
10.	Expected completion date:	
11.	Estimated maximum number of persons on the construction site:	
12.	Planned number of contractors on the construction site accountable to the principle contractor:	
13.	Name(s) of contractors already chosen.	

Principal Contractor	<u>]</u>	<u>Date</u>
<u>Client</u>	<u>]</u>	Date

- \* THIS DOCUMENT IS TO BE FORWARDED TO THE OFFICE OF THE DEPARTMENT OF LABOUR **PRIOR TO COMMENCEMENT** OF WORK ON SITE.
- \* ALL PRINCIPAL CONTRACTORS THAT QUALIFY TO NOTIFY MUST DO SO EVEN IF ANOTHER PRINCIPAL CONTRACTOR ON THE SAME SITE HAD DONE SO PRIOR TO THE COMMENCEMENT OF WORK.



# (COMPANY LETTER HEAD)

# OCCUPATIONAL HEALTH AND SAFETY ACT, 1993 (ACT 85 OF 1993):

SECTION/R	EGULATION:		
REQUIRED	COMPETENCY:		
In	terms	of	**
representing tl	he Employer) do hereby a	opoint	
As the Conpremises at	npetent Person on the		04,
(physical addr	ress) to assist in compliance	ee with the Act and the appli	icable Regulations.
Your designat	ed area/s is/are as follows  RENOVATE YARD MA	STER'S OFFICE AND SAND 02AM061P/02AM017P	HOUSE POLOKWANE
Date:		02AW011702AW0171	
Signature: - Designation:			
"P	ACCEPT	ANCE OF DESIGNATIO	<u>N</u>
I,		acknowledge that I	this Designation and
understand th	e requirements of this ap	pointment.	
Date:			
Signature: -			
Designation:	_		

# **ANNEXURE 3**

# (COMPANY LETTER HEAD)

# OCCUPATIONAL HEALTH AND SAFETY ACT, 1993 (ACT 85 OF 1993):

#### DECLARATION

In terms of the above Act I,	am personally assuming the duties
and obligations as Chief Executive Officer, defin	
Section 16(1), I will, as far as is reasonably practs of the Employer as contemplated in the above Act	icable, ensure that the duties and obligations
	4 O,
Signature: -	<u> </u>
Date:	<u>O'</u>



# **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

### RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

### RETURNABLE DOCUMENTS

# C.1.Returnable Schedules / Documents required for tender evaluation purposes (By e.g.

	Returnable Schedules / Documents	YES/NO/N/A
1	Certificate Of Authority For Joint Ventures (Where Applicable	х
2	Schedule of the Tenderers Experience	х
3	Certificate of Attendance at Clarification Meeting	x
4	Labour Payment Schedule	x
5	Supplier Declaration form (version2)	х
6	Letter of Good Standing with the Compensation Commissioner	x
7	Original / Certified BBBEE Rating Certificate With Detailed Scorecard	x
8	Statement Of Compliance With Requirements Of The Scope Of Work	x
9	Certified Copy of Financial Statements (for the past 3 years) including Balance SHEETSts where BBBEE not provided.	x
10	Certified Copy of Share Certificates CK1 & CK2	х
11	Certified Copy Of Certificate Of Incorporation and CM29 and CM9	х
12	Certified Copy of Identity Documents of Shareholders/Directors/Members (Where Applicable)	x
13	Cancelled Cheque	х
14	Original current Tax Clearance Certificate	х
15	Original Vat Registration Certificate	х
16	Copy of BEE Policy/BEE Plan/Employment Policy/Procurement Policy	x

SIGNATURE OF TENDERER:	Date:
------------------------	-------



#### **SECTION 7**

#### REQUEST FOR QUOTATION ("RFQ")

RFQ NO.: CRAC-POE-8861

#### RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

#### SUPPLIER DECLARATION FORM

# Transnet Supplier Declaration/Application

The Financial Director or Company Secretary

Transnet Vendor Management has received a request to load your company on to the Transnet vendor database. Please furnish us with the following to enable us to process this request:

- 1. Complete the "Supplier Declaration Form" (SDF) on page 2 of this letter
- Original cancelled cheque OR letter from the bank verifying banking details (with bank stamp)
- 3. Certified copy of Identity document of Shareholders/Directors/Members (where applicable)
- 4. **Certified** copy of certificate of incorporation, CM29 / CM9 (name change)
- Certified copy of share Certificates of Shareholders, CK1 / CK2 (if CC)
- 6. A letter with the company's letterhead confirming physical and postal addresses
- 7. Original or certified copy of SARS Tax Clearance certificate and Vat registration certificate
- A signed letter from the Auditor / Accountant confirming most recent annual turnover and percentage black ownership in the company AND/OR BBBEE certificate and detailed scorecard from an accredited rating agency (SANAS member).
- NB: Failure to submit the above documentation will delay the vendor creation process.
  - Where applicable, the respective Transnet business unit processing your application may request further information from you. E.g. proof of an existence of a Service/Business contract between your business and the respective Transnet business unit etc.

#### **IMPORTANT NOTES:**

- a) If your annual turnover is less than R5 million, then in terms of the DTI codes, you are classified as an Exempted Micro Enterprise (EME). If your company is classified as an EME, please include in your submission, a signed letter from your Auditor / Accountant confirming your company's most recent annual turnover is less than R5 million and percentage of black ownership and black female ownership in the company AND/OR BBBEE certificate and detailed scorecard from an accredited rating agency (e.g. permanent SANAS Member), should you feel you will be able to attain a better BBBEE score.
- b) If your annual turnover is between R5 million and R35million, then in terms of the DTI codes, you are classified as a Qualifying Small Enterprise (QSE) and you claim a specific BBBEE level based on any 4 of the 7 elements of the BBBEE score-card, please include your BEE certificate in your submission as confirmation of your status.
  - NB: BBBEE certificate and detailed scorecard should be obtained from an accredited rating agency (e.g. permanent SANAS Member).
- c) <u>If your annual turnover is in excess of R35million</u>, then in terms of the DTI codes, you are classified as a Large Enterprise and you claim a specific BEE level based on all seven elements of the BBBEE generic score-card. Please include your BEE certificate in your submission as confirmation of your status.
  - NB: BBBEE certificate and detailed scorecard should be obtained from an accredited rating agency (permanent SANAS Member).
- d) To avoid PAYE tax being automatically deducted from any invoices received from you, you must also contact the Transnet person who lodged this request on your behalf, so as to be correctly classified in terms of Tax legislation.

- Unfortunately, No payments can be made to a vendor until the vendor has been registered, and no vendor e) can be registered until the vendor application form, together with its supporting documentation, has been received and processed.
- Please return the completed Supplier Declaration Form (SDF) together with the required supporting f) documents mentioned above to the Transnet Official who is intending to procure your company's services/products in order that he/she should complete and Internal Transnet Departmental Questionnaire before referring the matter to the appropriate Transnet Vendor Master Office.

#### Regards,

Transnet Vendor/Supplier Management [please substitute this with your relevant Transnet department before sending this document out]

# Cumpliar Declaration Form

Supplier De	eciaralic	и гош	1							
Company Trading	Name									
Company Register	ed Name									
Company Registrat	ion Number (	Or ID Numbe	r If A Sole	Prop	rietor				12,	
Form of entity	CC	Trust	Pty	/ Ltd	Li	mited	Part	nership	Sole Proprie	tor
VAT number (if reg	gistered)									
Company Telepho	ne Number									
Company Fax Nun	nber							1		
Company E-Mail A	ddress									
Company Website Address										
Bank Name				Bank A	Accoun	t Number				
Postal						-				
Address					_	<del>) '</del>		Co	ode	
Physical Address					-			Co	ode	
Contact Person				_				00	ide	
Designation										
Telephone										
Email		•								
Annual Turnover Rai	nge (Last Fina	ancial Year)	< R5 Mil	llion		R5-35 n	nillion		> R35 million	
Does Your Compan	y Provide		Products			Services			Both	
Area Of Delivery	41	National				Provinci	Provincial		Local	
Is Your Company A	Public Or Pr	ivate Entity				Public			Private	
Does Your Compan	ny Have A Ta	x Directive O	Directive Or IRP30 Certificate			Yes		No		
Main Product Or Se	ervice Supplie	ed (E.G.: Stat	tionery/Co	onsulti	ng)					
BEE Ownership	etails									
% Black Ownership	C	% Black wome	n ownersh	qi		% D		person/s		
Does your compar					Yes		owner	rsnip No		
What is your broad	•			/ Unkr				110		
How many person		· · · · · · · · · · · · · · · · · · ·			nanent			Part time		
• • • • • • • • • • • • • • • • • • • •		- Intri Giripioy		. 0111	idilolli			r art time		
Transnet Contact I	Person									
Contact number										
Transnet operating	division									
Duly Authorised	To Sign For	And On Be	half Of F	irm /	Orgar	nisation				
Name					D	esignatio	n			
Signature					D	ate				

Stamp And Signature Of Commissioner Of Oath					
Name		Date			
Signature		Telephone No.			

NB: Please return the completed Supplier Declaration Form (SDF) together with the required supporting documents mentioned above to the Transnet Official who is intending to procure your company's services/products.

## 2. VENDOR TYPE OF BUSINESS

(Please tick as applicable)

(\* - Minimum requirements)

2.1	Indicate the bu	siness sector in which your company is involved/operatin	ıg:
Agriculture	e	Mining and Quarrying	
Manufactu	ıring	Construction	
Electricity,	, Gas and Water	Finance and Business Services	
Retail, Mo Services	tor Trade and Repair	Wholesale Trade, Commercial Agents and Allied Services	
Catering, and Other Trace	accommodation and de	Transport, Storage and Communications	
Communit Personal S	ty, Social and Services	Other (Specify)	
Principal E	Business Activity *		
Types of S	Services Provided		
Since whe	en has the firm been s?		

2.2	What is	your co	mpany's	annual turn	over (ex	cluding	<b>VAT)?</b>	k .	
<r20k< th=""><th>&gt;R20k <r0.3m< th=""><th>&gt;R0.3m <r1m< th=""><th>&gt;R1m <r5m< th=""><th>R6m R10m</th><th>&gt;R11m <r15m< th=""><th>&gt;R16m <r25m< th=""><th>&gt;R26m <r30m< th=""><th>&gt;R31m <r34m< th=""><th>&gt;R35m</th></r34m<></th></r30m<></th></r25m<></th></r15m<></th></r5m<></th></r1m<></th></r0.3m<></th></r20k<>	>R20k <r0.3m< th=""><th>&gt;R0.3m <r1m< th=""><th>&gt;R1m <r5m< th=""><th>R6m R10m</th><th>&gt;R11m <r15m< th=""><th>&gt;R16m <r25m< th=""><th>&gt;R26m <r30m< th=""><th>&gt;R31m <r34m< th=""><th>&gt;R35m</th></r34m<></th></r30m<></th></r25m<></th></r15m<></th></r5m<></th></r1m<></th></r0.3m<>	>R0.3m <r1m< th=""><th>&gt;R1m <r5m< th=""><th>R6m R10m</th><th>&gt;R11m <r15m< th=""><th>&gt;R16m <r25m< th=""><th>&gt;R26m <r30m< th=""><th>&gt;R31m <r34m< th=""><th>&gt;R35m</th></r34m<></th></r30m<></th></r25m<></th></r15m<></th></r5m<></th></r1m<>	>R1m <r5m< th=""><th>R6m R10m</th><th>&gt;R11m <r15m< th=""><th>&gt;R16m <r25m< th=""><th>&gt;R26m <r30m< th=""><th>&gt;R31m <r34m< th=""><th>&gt;R35m</th></r34m<></th></r30m<></th></r25m<></th></r15m<></th></r5m<>	R6m R10m	>R11m <r15m< th=""><th>&gt;R16m <r25m< th=""><th>&gt;R26m <r30m< th=""><th>&gt;R31m <r34m< th=""><th>&gt;R35m</th></r34m<></th></r30m<></th></r25m<></th></r15m<>	>R16m <r25m< th=""><th>&gt;R26m <r30m< th=""><th>&gt;R31m <r34m< th=""><th>&gt;R35m</th></r34m<></th></r30m<></th></r25m<>	>R26m <r30m< th=""><th>&gt;R31m <r34m< th=""><th>&gt;R35m</th></r34m<></th></r30m<>	>R31m <r34m< th=""><th>&gt;R35m</th></r34m<>	>R35m

2.3 Where are your opera	Where are your operating/distribution centres situated *							
(4)								

## 3. VENDOR OWNERSHIP DETAIL

(Please tick as applicable)

(\* - Minimum requirements)

3.1	Did the firm previously operate under another name? *						
YES	NO						

3.2	If Yes state its previous name:*
Registered N	Nam

Trading Nan	ne											
	100								<b>O</b> th			
3.3	•		s previou	s ow	ners / p							
SURNAME & INITIALS								MBE	RS			
3.4	List [	Details (	of curren	t pari	tners. r	ror	orietors	and	sharehold	ders by i	name.	
									hip as rele		,	
SURNAME	IDEN		CITI-		DIS		GENDER		DATE OF	%	%	
& INITIALS	NUM	BER	ZENSHIP	HDI	ABLE	D		0\	WNERSHIP	OWNED	VOTING	
										4		
									13	*		
3.5	l ist c	lotaile (	of current	t dira	ctors (	γffiα	care ch	airm	an, secret	tary etc		
0.0		e firm:		unc	01013, 1	J1110	5015, 011	u	iaii, scorei	iai y Cio.		
SURNAME		ENTITY	TITLE		DIS -	GE	NDER	9/	6 OF TIME	CONT	ACT	
& INITIALS	N	UMBER		ABLED			DEV	OTED TO THE	NUMB	ER		
									FIRM			
				•	U							
				1								
				3			I					
3.6		letails ( ner firm		erso	nnel wl	10 ł	nave an	own	ership int	erest in		
SURNAME		ENTITY	NAME	& ADD	RESS	TI	TLE IN OT	HER	% OWNED	TYPE	)F	
& INITIALS		UMBER	OF OT				FIRM		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	BUSIN	NESS OF	
										OTHER	RFIRM	
		. —										
									1			
4. VENDOR	R DETA	AIL										
(Please tick as			* - Minimum	requir	rements)							
4.1	How m	any perso	onnel does t	he firm	n employ	<b>?</b> *						
	BL	ACK	WHITE		COLOUR	ED	INDIA	N	OTHER	ТО	TAL	
Permanent			1									
Part Time												

In terms of above kindly provide numbers on women and disabled personnel? \*

4.1.1

	BLACK	WHITE	COLOURED	INDIAN	OTHER	TOTAL
Women						
Disabled						
4.2	Provide Details o			ble for Broad Ba	sed Black Ecor	nomic
	Empowerment (B	INITIALS		GNATION	TELE	PHONE NO.
30	JRNAME	INITIALS	DESI	GNATION	IELER	PHONE NO.
404	Is your company	a value adding	supplier (i.e. ı	registered as a w	rendor under the	e VAT Act of 19
4.2.1	where NPAT + tota					
YES		NO				
4.0.0	La vana aamaan a	vaciniont of F	otowania o Dove	lannant Cantuil	ti.a.m.a.O.*	100
4.2.2	Is your company a	•	iterprise Deve	nopment Contril	outions?"	
YES		NO			•	
4.2.3	May the above me	entioned inform	ation be share	ed and included	in Transnet Sur	oplier Database
	future reference?	*				
YES		NO				
404	If you are succes	seful in the top	dor/contract	(whore applical	alp) and this is	awarded to
4.2.4	company /			e a positive impa		
YES		NO			-	· ·
4.2.5	If yes (above) kind	lly provide the	following info	mation:		
	BLACK	WHITE	COLOURE	INDIAN	OTHER	TOTAL
Permanent Part Time						
1 art rillie				<u> </u>		
4.2.6	In terms of above	kindly provide	numbers on v	voman and disa	bled personnel:	
	BLACK	WHITE	COLOURE	INDIAN	OTHER	TOTAL
Women						
Disabled						
4.2.7	Are any of your m	embers/shareh	olders/directo	rs ex employees	s of Transnet?	
YES		NO		7		
4.2.8	Are any of your fa	mily members	employees of	Transnet?		
YES		NO				
4.2.9	If Yes to points	4.2.7 & 4.2.8, I	ist details of	employees/ex	-employees	
SURNAME	IDENTITY	NAME & AD	DRESS T	ITLE IN OTHER	% OWNED	TYPE OF BU
& INITIALS	NUMBER	OF OTHER	FIRM	FIRM		OF OTHER F
_						

# Internal Transnet Departmental Questionnaire (for office use only)

Section 1: To be completed by the Transnet Requesting / Sourcing Department											
TFR		TRE		TPT		TPL		TNPA		TRN	
Create		Amend		Block		Unblock		Once-Off /	Emerg	ency	
Extend		Delete		Undele							
Supplier's trading name											
Supplier	Supplier's registered name										
Please i	Please indicate if the Supplier has a contract with sourcing Transnet OD Yes										
If yes ple	ease sul	omit a cop	y of th	e letter of	award						
a) Wha	at is bei	ng procu	red fro	m the su	oplier?			· ·		A	
i. Prod	ducts on	ly			Yes			No			
	ices on	ly			Yes			No			
	our only				Yes			No			
		ces and pr		3	Yes			No			
		ces and la			Yes			No			
ques	tionnaire	s have bee	n forwa	irded to the a	appropriat	e Transnet	Operatio	se indicate whe	decisio	n making boo	dies /
Strat	egic Sup	ply Manag	ement	team for a di	rective /d	ecision on t	x withhol	ding from payn	nents to	this supplier	
Y	Zes		No				X				
c) If yo	ur reply	to ( <b>b</b> ) is "I	<b>VO</b> ", p	lease furni	sh reas	ons :	)				
					•						
				of propos		dor Creat	ion/Unb	olocking/Oth	er Cha	anges by T	ransnet
LUEDED	V CERT	ICV TUAT :		DAMCNET I	OFTAU F	D DDOCUE	CACAL	DDOCECC /F	NDD\ / D	DOCUDEM	ENT
								PROCESS (D HEREFORE A			
								ON THE VEN			PUSED
			7								
	Nan	ne		Grad	е	V V 1	Date			Signat	ure
		$\mathcal{Y}$				YYY	Y	M D	D		
Tel No:						Fax					
4											
Section 2: To be completed by the BEE Department (this section is for Confirmation/Determining of BEE Status)											
NAF	RROW BA	SED (NB)						ASED (BBBEE	)		
BEE O/S	BWBE	DPBE I	ИR	CONTB. LEVEL	EME: <r5m< td=""><td></td><td></td><td>LARGE: &gt;R35m</td><td></td><td>VALIDITY D</td><td>ATE</td></r5m<>			LARGE: >R35m		VALIDITY D	ATE
	Nan	ne		Grad	е		Date	)		Signat	ure
						YYY	Y	M D E			
						YYY	Y	M D E			
			•		<u> </u>				•		



#### **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

GENERAL TERMS AND CONDITIONS (CSS5 – GOODS)

See attached documents



#### **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

#### RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

-RVICES)



#### **SECTION 10**

#### **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

# RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P

## 

Transnet and the Company wish to exchange Information (as defined below) and it is envisaged that each party may from time to time receive Information relating to the other in respect thereof. In consideration of each party making available to the other such Information, the parties jointly agree that any dealings between them shall be subject to the terms and conditions of this Agreement which themselves will be subject to the parameters of the Proposal.

#### IT IS HEREBY AGREED

- 1. Interpretation
- 1.1 In this Agreement:-
  - "Agents" means directors, officers, employees, agents, professional advisers, contractors or subcontractors, or any Group member;
  - "Confidential Information" means Information relating to one party (the "Disclosing Party") and/or the business carried on or proposed or intended to be carried on by that party and which is made available for the purposes of the Proposal to the other party (the "Receiving Party") or its Agents by the Disclosing Party or its Agents or recorded in agreed minutes following oral disclosure and any other information otherwise made available by the Disclosing Party or its Agents to the Receiving Party or its Agents, whether before, on or after the date of this Agreement, and whether in writing or otherwise, including any information, analysis or specifications derived from, containing or reflecting such information but excluding information which:-
  - (i) is publicly available at the time of its disclosure or becomes publicly available (other than as result of disclosure by the Receiving Party or any of its Agents contrary to the terms of this letter); or

- (ii) was lawfully in the possession of the Receiving Party or its Agents (as can be demonstrated by its written records or other reasonable evidence) free of any restriction as to its use or disclosure prior to its being so disclosed; or
- (iii) following such disclosure, becomes available to the Receiving Party or its Agents (as can be demonstrated by its written records or other reasonable evidence) from a source other than the Disclosing Party or its Agents, which source is not bound by any duty of confidentiality owed, directly or indirectly, to the Disclosing Party in relation to such information;

"Group" means any subsidiary, any holding company and any subsidiary of any holding company of either party;

"Information" means all information in whatever form including, without limitation, any information relating to systems, operations, plans, intentions, market opportunities, know-how, trade secrets and business affairs whether in writing, conveyed orally or by machine-readable medium;

"Proposal" means the aggregation of Transnet's Request for Information (RFI) and Request for Proposal (RFP).

#### 2. Confidential Information

- 2.1 The Receiving Party will treat and keep all Confidential Information as secret and confidential and will not, without the Disclosing Party's written consent, directly or indirectly communicate or disclose (whether in writing or orally or in any other manner) Confidential Information to any other person other than in accordance with the terms of this Agreement.
- 2.2 The Receiving Party will only use the Confidential Information for the sole purpose of technical and commercial discussions between the parties in relation to the Proposal or for the subsequent performance of any contract between the parties in relation to the Proposal.
- 2.3 Notwithstanding clause 2.1, the Receiving Party may disclose Confidential Information:
  - (i) To those of its Agents who strictly need to know the Confidential Information for the sole purpose set out in clause 2.2 provided that the Receiving Party shall ensure that such Agents are made aware prior to the disclosure of any part of the Confidential Information that the same is confidential and that they owe a duty of confidence to the Disclosing Party. The Receiving Party shall at all times remain liable for any actions of such Agents that would constitute a breach of this Agreement; or
  - (ii) to the extent required by law or the rules of any applicable regulatory authority, subject to clause 2.4 below.
- 2.4 In the event that the Receiving Party is required to disclose any Confidential Information in accordance with clause 2.3 (ii) above, it shall promptly notify the Disclosing Party and co-operate with the Disclosing Party regarding the form, nature, content and purpose of such disclosure or any action which the Disclosing Party may reasonably take to challenge the validity of such requirement.
- 2.5 In the event that any Confidential Information shall be copied, disclosed or used otherwise than as permitted under this Agreement then, upon becoming aware of the same, without prejudice to any rights or remedies of the Disclosing Party, the Receiving Party shall as soon as practicable notify the Disclosing Party of such event and if requested take such steps (including the institution of legal proceedings) as shall be necessary to remedy (if capable of remedy) the default and/or to prevent further unauthorised copying, disclosure or use.
- 2.6 All Confidential Information shall remain the property of the Disclosing Party and its disclosure shall not confer on the Receiving Party any rights, including intellectual property rights, over the Confidential Information whatsoever beyond those contained in this Agreement.
- 3. Records and return of Information

- 3.1 The Receiving Party agrees to ensure proper and secure storage of all Information and any copies thereof to at least the same standard as the Receiving Party keeps its own Confidential Information. The Receiving Party shall not make any copies or reproduce in any form any Confidential Information except for the purpose of disclosure as permitted in accordance with this Agreement.
- 3.2 The Receiving Party shall keep a written record, to be supplied to the Disclosing Party upon request, of the Confidential Information provided and any copies made thereof and, so far as is reasonably practicable, of the location of such Confidential Information and any copies thereof.
- 3.3 The Receiving Party shall, within seven days of receipt of a written demand from the Disclosing Party or of its ceasing to be interested in the Proposal:
  - (i) Return all written Confidential Information (including all copies); and
  - (ii) expunge or destroy any Confidential Information from any computer, word processor or other device whatsoever into which it was copied, read or programmed by the Receiving Party or on its behalf (including by any person to whom disclosure has been made as permitted under clause 2.3(i) above.

The obligations in this clause 3.3 shall not apply to the extent that (but only for so long as) it is necessary to retain copies for the purpose of providing information to any regulatory authority in accordance with clause 2.3 (ii) above.

3.4 The Receiving Party shall on request supply a certificate signed by a director as to its full compliance with the requirements of clause 3.3 (ii) above.

#### 4. Announcements

- 4.1 Neither party will make or permit to be made any announcement or disclosure of its prospective interest in the Proposal without the prior written consent of the other party.
- 4.2 Neither party shall make use of the other party's name or any information acquired through its dealings with the other party for publicity or marketing purposes without the prior written consent of the other party.

#### 5. Duration

The obligations of each party and its Agents under this Agreement shall [be continuing and shall survive the termination of any discussions or negotiations between the parties regarding the Proposal continue for a period of 3 (three) years.

#### 6. Principa

Each party confirms that it is acting as principal and not as nominee, agent or broker for any other person and that it will be responsible for any costs incurred by it or its advisers in considering or pursuing the Proposal and in complying with the terms of this Agreement.

#### 7. Representations

- 7.1 Each party agrees that any Information made available to the Receiving Party or its Agents for the purpose of negotiations or discussions in relation to the Proposal will not form the basis of, or any representation in relation to, any contract, nor constitute an offer or invitation by the Disclosing Party.
- 7.2 Except in the case of fraudulent misrepresentation, the Disclosing Party accepts no responsibility for nor makes any representation or warranty, express or implied, with respect to the accuracy, reliability or completeness of any Information made available to the Receiving Party or its Agents.

#### 8. Adequacy of damages

- 8.1 Without prejudice to any other rights or remedies of the Disclosing Party, the Receiving Party acknowledges and agrees that damages would not be an adequate remedy for any breach by it of the provisions of this Agreement and that the Disclosing Party shall be entitled to seek the remedies of injunction, specific performance and other equitable relief for any threatened or actual breach of any such provision by the Receiving Party or its Agents, and no proof of special damages shall be necessary for the enforcement of the rights under this Agreement.
- 8.2 Nothing contained in this Agreement shall be construed as prohibiting the Disclosing Party from pursuing any other remedies available by it, either at law or in equity, for any such threatened or actual breach of this Agreement including specific performance, recovery of damages or otherwise.

#### 9. Data Protection

The Receiving Party warrants that it and its Agents have the appropriate technical and organizational measures in place against unauthorized or unlawful processing of personal data and against accidental loss or destruction of, or damage to, personal data held or processed by them.

#### 10. General

- 10.1 Neither party may assign the benefit of this Agreement or any interest hereunder except with the prior written consent of the other, save that Transnet may assign this Agreement at any time to any member of the Transnet Group.
- 10.2 No failure or delay in exercising any right, power or privilege under this Agreement will operate as a waiver of it, nor will any single or partial exercise of it preclude any further exercise or the exercise of any right, power or privilege under this Agreement or otherwise.
- 10.3 The provisions of this Agreement shall be severable in the event that any of its provisions are held by a court of competent jurisdiction or other applicable authority to be invalid, void or otherwise unenforceable, and the remaining provisions shall remain enforceable to the fullest extent permitted by law.
- 10.4 This Agreement may only be modified by a written agreement duly signed by persons authorized on behalf of each party.
- 10.5 Nothing in this Agreement shall constitute the creation of a partnership, joint venture or agency between the parties.

10.6
his Agreement will be governed by, and construed in accordance with South African law and the parties irrevocably submit to the exclusive jurisdiction of the South African courts.

Т

**IN WITNESS WHEREOF**, the parties hereto have caused this Agreement to be executed by their respective duly authorized representatives.

TRANSNET LIMITED:
By:(Signature)
Print name:
Title:

Date:				
[Insert company r	ame]:			
By:(Signature)				
Print name:				
Title:				
Date:				
			$\cdot$	
			)	
		M.		
"PR				



#### **SECTION 11**


#### **REQUEST FOR QUOTATION ("RFQ")**

**RFQ NUMBER: CRAC-POE-8861** 

JOHN CORY ONLY RENOVATE YARD MASTER'S OFFICE AND SAND HOUSE POLOKWANE 02AM061P/02AM017P





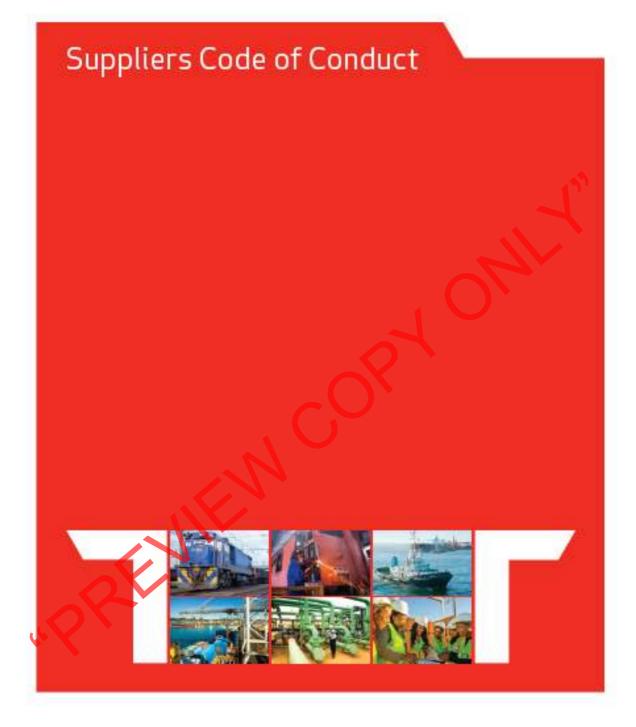

# Suppliers Code of Conduct

Transnet aims to achieve the best value for money when buying or selling goods and obtaining services. This, however, must be done in an open and fair manner that supports and drives a competitive economy. Underpinning our process are several acts and policies that any supplier dealing with Transnet must understand and support.

#### These are:

- >> Transnet Procurement Policy A guide for tenderers;
- Section 217 of the Constitution the five pillars of Public PSCM (Procurement and Supply Chain Management): fair, equitable, transparent, competitive and cost effective;
- >> The Public Finance Management Act (PFMA);
- The Broad Based Black Economic Empowerment Act (BBBEE); and
- >> The Anti-Corruption Act.

This code of conduct has been compiled to formally apprise Transnet Suppliers of Transnet's expectations regarding behaviour and conduct of its Suppliers

# Prohibition of Briber, Kickbacks, Unlawful Payments, and Other Corrupt Practices

Transnet is in the process of transforming itself into a selfsustaining State Owned Enterprise, actively competing in the logistics industry. Our aim is to become a world class, profitable, logistics organisation. As such, our transformation is focused on adopting a performance culture and to adopt behaviours that will enable this transformation.

# Transnetwill not participate in corrupt practices. Therefore, it expects its suppliers to act in a similar manner.

Transnet and its employees will follow the laws of this country and keep accurate business records that reflect actual transactions with, and payments to, our suppliers.





Employees must not accept or request money or anything of value, directly or indirectly, from suppliers.

Employees may not recieve anything that is calculated to:

- Illegally influence their judgement or conduct or to influence the outcome of a sourcing activity;
- Win or retain business or to influence any act or decision of any person involved in sourcing decisions; gain an improper advantage.
- There may be times when a supplier is confronted with fraudulent or corrupt behaviour of Transnet employees. We expect our suppliers to use our "Tip-offs Anonymous" Hotline to report these acts - 0800 003 056.

# Transnet is firmly committed to free and competitive enterprise.

- Suppliers are expected to comply with all applicable laws and regulations regarding fair competition and artitrust practices
- Transnet does not engage non-value adding agents or representatives solely for the purpose of increasing BBBEE spend (fronting).

Transmet's relationship with suppliers requires us to clearly define requirements, to exchange information and share mutual benefits.

Senerally, suppliers have their own business standards and regulations. Although Transnet cannot control the actions of our suppliers, we will not tolerate any illegal activities.







#### These include, but are not limited to:

- Misrepresentation of their product (origin of manufacture, specifications, intellectual property rights, etc);
- -Collusion:
- Failure to disclose accurate information required during the sourcing activity (ownership financial situation, BBBEE status, etc.);
- Corrupt activities listed above; and harassment, intimidation or other aggressive actions towards
   Transnet employees.
- Suppliers must be evaluated and approved before any materials, components, products or services are purchased from them. Rigorous due diligence must be conducted and the supplier is expected to participate in an honest and straight forward manner.
- Suppliersmustrecordandreport facts accurately, honestly and objectively. Financial records must be accurate in all material respects.







### Conflict of Interest

A conflict of interest arises when personal interests or activities influence (or appear to influence) the ability to act in the best interests of Transnet. Examples are:

- >> Doing business with family members.
- Having a financial interest in another company in our industry.



Show that you support good business practice by logging onto www.transnet-suppliers.net and completing the form.

This will allow us to confirm that you have received, and agree to, the terms and conditions set out in our Suppliers Code of Conduct.

0800 003 056